


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB87946YL-LSX

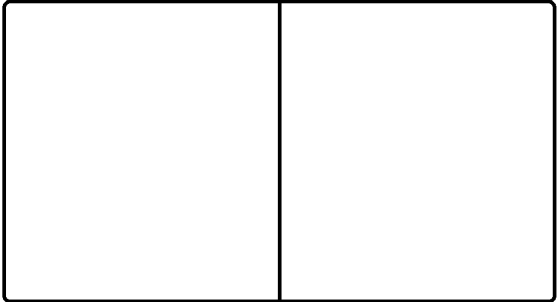

効 率	F	3 %
	F	97 %
	F	100 %
	器具 光束	270 lm

保守 率	良	0.69
	中	0.67
	否	0.63

前面	
反射面	

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	490	490	490
10°	500	505	498
20°	215	225	207
30°	169	170	159
40°	193	216	187
50°	221	212	185
60°	211	202	184
70°	153	155	144
80°	81	80	74
90°	19	25	24
100°	12	13	13
110°	7	8	7
120°	1	1	1
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 (×0.01)																			
0.60	59	54	44	41	35	34	57	52	43	41	34	33	41	39	33	32	32	32	27	25
0.80	70	63	54	51	45	43	67	61	53	50	44	42	51	48	42	41	41	40	35	33
1.00	77	69	61	57	51	49	74	67	60	56	50	48	57	54	49	47	47	46	40	38
1.25	84	75	70	64	59	55	81	73	68	63	58	55	64	60	56	53	54	52	47	44
1.50	89	79	75	68	65	60	86	77	73	67	64	60	69	65	61	58	59	57	51	49
2.00	98	85	86	77	76	69	94	83	83	75	74	68	78	72	71	67	67	65	60	57
2.50	103	89	92	81	83	75	99	87	89	80	81	74	83	77	77	72	73	70	65	63
3.00	107	92	97	85	89	79	103	90	94	84	86	78	88	81	82	76	77	74	70	67
4.00	112	96	104	90	97	86	108	94	101	89	94	84	94	86	89	82	84	80	76	73
5.00	116	98	109	93	103	89	111	96	105	92	99	88	98	89	93	86	88	83	80	77
10.00	123	103	119	100	116	98	118	101	114	99	111	97	106	96	104	94	97	92	89	86

