


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87037YL-LSX

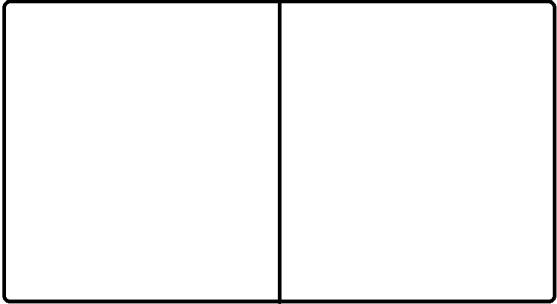

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	300 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.3 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	448	448	448
10°	448	445	447
20°	425	419	425
30°	379	367	378
40°	333	311	331
50°	270	224	262
60°	210	116	188
70°	89	24	65
80°	17	7	13
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0	
室指数	固有照明率 (×0.01)																								
0.60	65	60	52	49	43	42	64	59	51	49	43	42	49	47	42	41	42	41	37	35					
0.80	78	71	65	61	56	54	76	70	64	60	55	53	62	59	54	53	53	52	48	46					
1.00	85	77	72	67	64	60	83	75	71	66	63	60	69	65	61	59	60	58	54	52					
1.25	93	83	81	74	72	68	90	81	79	73	71	67	76	72	69	66	67	65	61	59					
1.50	98	87	87	79	78	73	95	85	85	78	77	72	81	76	75	71	72	70	66	64					
2.00	106	92	96	86	89	81	103	91	94	85	87	80	90	83	84	79	81	78	74	73					
2.50	111	95	102	90	95	86	107	94	99	89	93	85	94	87	89	84	86	82	79	77					
3.00	114	98	106	93	100	89	110	96	103	92	98	88	98	90	93	87	89	86	83	81					
4.00	118	101	112	97	107	94	114	99	109	96	104	93	103	94	99	91	94	90	87	85					
5.00	121	102	116	99	111	97	116	101	112	98	108	96	105	96	102	94	97	92	90	88					
10.00	126	105	123	104	120	102	121	104	119	103	116	101	111	100	109	99	103	97	96	94					

