


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH87035L-LSX

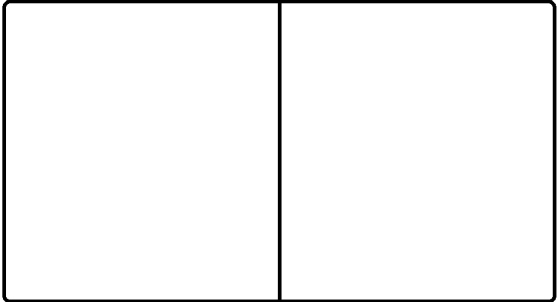

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	1040 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.0 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	467	467	467
10°	463	470	467
20°	404	431	418
30°	318	368	343
40°	234	300	266
50°	156	221	187
60°	97	152	122
70°	50	87	65
80°	19	32	22
90°	0	0	0
100°	0	0	0
110°	0	0	0
120°	0	0	0
130°	0	0	0
140°	0	0	0
150°	0	0	0
160°	0	0	0
170°	0	0	0
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	68	63	55	52	47	45	66	61	54	51	46	45	52	50	46	44	45	44	40	38
0.80	80	73	67	63	59	56	78	72	66	62	58	56	64	61	57	55	56	55	51	49
1.00	87	78	74	69	66	62	85	77	73	68	65	62	70	67	63	61	62	60	56	55
1.25	94	84	82	75	74	69	91	82	80	74	73	69	77	73	71	68	69	67	63	61
1.50	99	87	88	80	79	74	96	86	86	79	78	73	82	77	76	72	73	71	67	65
2.00	107	93	97	87	89	81	103	91	94	86	87	81	90	84	84	80	81	78	75	73
2.50	111	96	102	90	95	86	107	94	100	89	93	85	94	87	89	84	86	82	79	77
3.00	114	98	106	93	100	89	110	96	103	92	98	88	98	90	93	87	89	86	83	81
4.00	118	101	112	97	107	94	114	99	109	96	104	93	102	94	99	91	94	90	87	85
5.00	121	102	116	99	111	96	116	101	112	98	108	96	105	96	102	94	97	92	90	88
10.00	126	105	123	104	120	102	121	104	119	103	116	101	111	100	109	99	103	97	96	94

