


東芝ランプ 配光データシート

名称	東芝LED電球ハロゲン形
形名	LDR6L-W-E11
光束	420 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

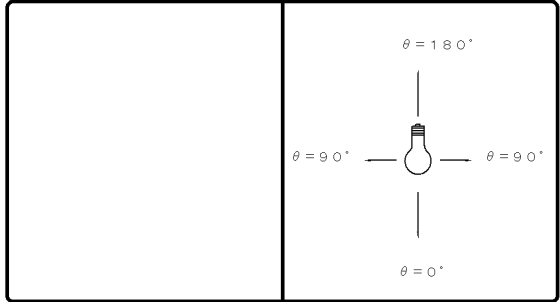

効率	F		%
	F		%
	F	100	%
	器具光束	420	lm

最大取付間隔	
A-A	0.6 H
B-B	0.6 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
0°	2998	25°	465
1°	2995	30°	182
2°	2984	35°	80
3°	2966	40°	50
4°	2931	45°	34
5°	2885	50°	27
6°	2822	55°	22
7°	2751	60°	17
8°	2667	65°	12
9°	2574	70°	4
10°	2467	75°	1
11°	2347	80°	0
12°	2215	85°	0
13°	2073	90°	0
14°	1924		
15°	1770		
16°	1613		
17°	1458		
18°	1304		
19°	1156		
20°	1012		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70		50		30		70		50		30		50		30		30		10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室指数	照明率 (×0.01)																						
0.60	101	93	91	87	85	83	99	92	90	86	85	83	89	86	84	82	83	82	79	78			
0.80	109	99	100	93	94	90	107	98	99	93	93	89	97	92	92	89	90	88	86	85			
1.00	115	103	106	98	100	95	113	103	105	98	99	94	102	97	97	94	96	93	91	90			
1.25	119	106	110	101	104	98	116	105	108	100	103	97	105	99	100	96	98	95	93	92			
1.50	122	107	113	103	107	100	119	106	111	102	106	99	108	101	103	98	100	97	95	93			
2.00	126	101	119	106	113	103	123	109	116	105	111	102	111	103	107	101	104	100	97	96			
2.50	129	111	122	108	117	105	125	110	119	107	115	105	114	105	110	103	106	102	100	98			
3.00	132	113	126	110	121	108	128	112	122	109	118	107	116	107	113	105	108	104	102	100			
4.00	135	115	130	113	126	111	131	113	127	112	123	110	120	110	117	108	112	107	105	103			
5.00	137	116	133	115	130	113	133	115	130	114	127	112	122	111	120	110	114	109	107	105			
10.00	142	119	141	119	139	118	137	118	136	118	135	117	128	115	127	115	120	113	112	110			

