

# 東芝照明器具配光データシート


|    |                 |
|----|-----------------|
| 名称 | 東芝LED屋外照明器具     |
| 形名 | LEDG-78926L-LS1 |

|    |    |            |
|----|----|------------|
| 光源 | 名称 | LED        |
|    | 形名 | LED        |
|    | 光束 | 570 lm × 1 |



|     |            |
|-----|------------|
| 前面  | グローブ (半透明) |
| 反射面 |            |

|     |   |      |
|-----|---|------|
| 保守率 | 良 | 0.69 |
|     | 中 | 0.67 |
|     | 否 | 0.63 |

|    |                 |        |
|----|-----------------|--------|
| 効率 | F $\frac{1}{2}$ | 6.2 %  |
|    | F $\frac{3}{4}$ | 94.1 % |
|    | F $\bigcirc$    | 100 %  |
|    | 器具光束            | 570 lm |

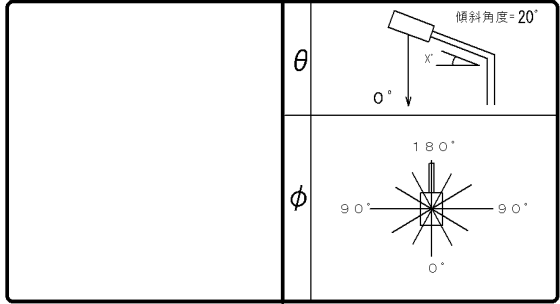

備考

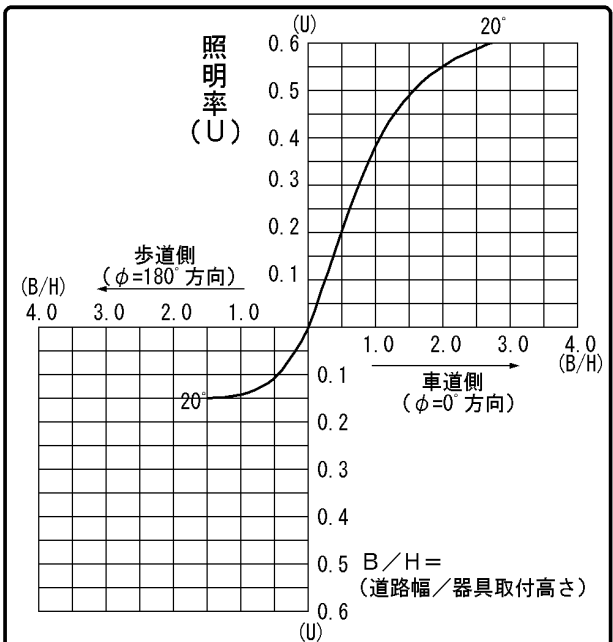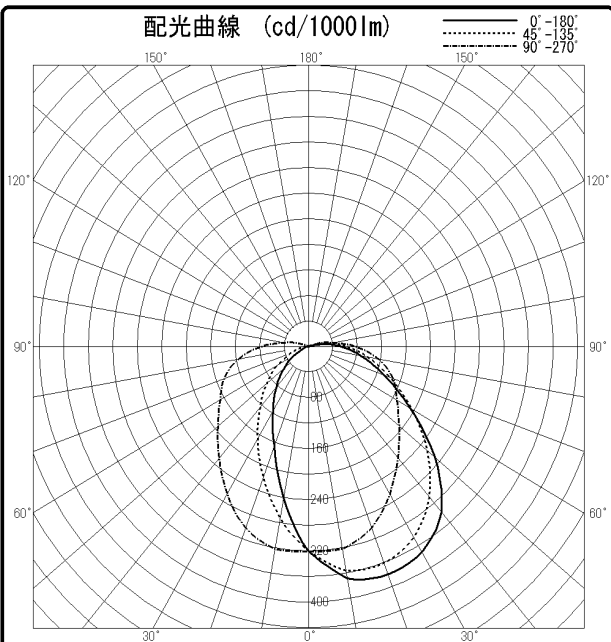

| θ \ φ | 0°  | 45° | 90° | 135° | 180° |
|-------|-----|-----|-----|------|------|
| 0°    | 320 | 320 | 320 | 320  | 320  |
| 10°   | 368 | 356 | 321 | 272  | 240  |
| 20°   | 379 | 360 | 302 | 217  | 166  |
| 30°   | 371 | 345 | 266 | 167  | 116  |
| 40°   | 338 | 307 | 228 | 124  | 82   |
| 50°   | 269 | 254 | 194 | 89   | 53   |
| 60°   | 191 | 195 | 167 | 60   | 27   |
| 70°   | 131 | 142 | 147 | 34   | 10   |
| 80°   | 88  | 99  | 117 | 18   | 5    |
| 90°   | 54  | 63  | 77  | 8    | 2    |
| 100°  | 24  | 33  | 39  | 2    | 1    |
| 110°  | 6   | 16  | 16  | 1    | 1    |
| 120°  | 3   | 6   | 4   | 1    | 1    |
| 130°  | 1   | 1   | 1   | 1    | 1    |
| 140°  | 1   | 1   | 1   | 0    | 0    |
| 150°  | 1   | 1   | 1   | 0    | 0    |
| 160°  | 1   | 1   | 0   | 0    | 0    |
| 170°  | 1   | 0   | 0   | 0    | 0    |
| 180°  | 0   | 0   | 0   | 0    | 0    |

