


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH80177-LC

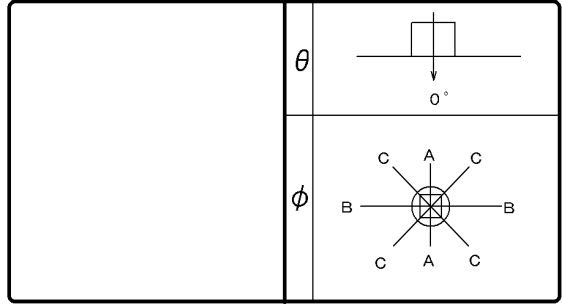

効 率	F $\frac{1}{2}$	6 %
	F $\frac{3}{4}$	94 %
	F \bigcirc	100 %
	器具 光束	3100 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	333	333	333
10°	326	326	326
20°	305	305	305
30°	273	273	273
40°	231	231	231
50°	185	185	185
60°	136	136	136
70°	90	90	90
80°	50	50	50
90°	24	24	24
100°	12	12	12
110°	8	8	8
120°	7	7	7
130°	8	8	8
140°	8	8	8
150°	8	8	8
160°	8	8	8
170°	7	7	7
180°	0	0	0

反射率 (%)	天井			70			50			30			20			0				
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0	10	0	10	0		
室指数	固有照明率 (×0.01)																			
0.60	62	57	47	45	39	38	59	55	46	44	38	37	44	43	37	36	36	35	31	29
0.80	73	67	59	56	50	48	71	65	58	54	49	47	55	53	48	46	46	45	40	38
1.00	80	72	66	62	57	54	77	70	65	60	56	53	61	58	54	52	52	51	46	43
1.25	88	78	75	68	65	61	85	76	72	67	64	60	68	64	61	59	59	57	52	50
1.50	93	82	80	73	71	66	89	80	78	71	69	65	73	69	66	63	63	61	57	54
2.00	101	88	90	80	81	74	97	86	87	79	79	73	82	76	75	71	71	69	64	62
2.50	106	91	96	85	88	79	101	89	92	83	85	78	86	80	81	75	76	73	69	66
3.00	109	94	100	88	93	83	105	91	97	86	90	82	90	83	85	79	80	77	73	70
4.00	114	97	107	92	100	88	109	95	103	90	97	87	95	87	91	84	85	81	78	75
5.00	117	99	110	95	105	91	112	97	106	93	101	90	98	90	95	87	88	84	81	78
10.00	123	103	119	100	116	98	117	101	114	99	111	97	105	95	103	94	96	90	88	85

