


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81157-LC

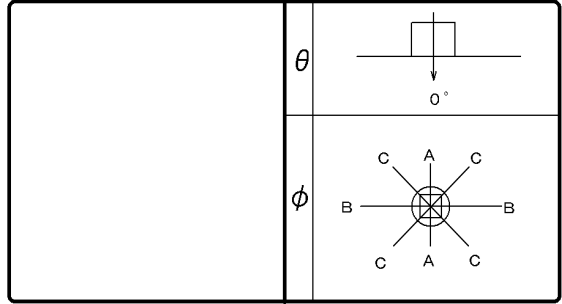

効 率	F $\frac{1}{2}$	7 %
	F $\frac{3}{4}$	93 %
	F $\bigcirc$	100 %
	器具 光束	3830 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	308	308	308
10°	302	302	302
20°	285	285	285
30°	257	257	257
40°	222	222	222
50°	182	182	182
60°	139	139	139
70°	96	96	96
80°	58	58	58
90°	31	31	31
100°	17	17	17
110°	11	11	11
120°	8	8	8
130°	6	6	6
140°	6	6	6
150°	6	6	6
160°	6	6	6
170°	5	5	5
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	60	56	46	44	37	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27
0.80	72	65	58	54	48	46	69	64	56	53	47	46	53	51	46	44	44	43	38	36
1.00	79	71	65	60	55	52	76	69	63	59	54	52	60	57	52	50	50	49	44	41
1.25	87	77	73	67	63	59	83	75	71	66	62	58	67	63	59	57	57	55	50	47
1.50	92	81	79	71	69	64	88	79	76	70	68	63	72	67	64	61	61	59	55	52
2.00	100	87	89	79	80	73	96	85	85	77	77	71	80	74	73	69	70	67	62	59
2.50	105	90	94	83	86	78	100	88	91	82	84	76	85	78	79	74	74	71	67	64
3.00	108	93	99	87	91	82	103	91	95	85	89	80	89	82	83	77	78	75	71	68
4.00	113	96	105	91	99	87	108	94	101	89	95	85	94	86	89	82	84	80	76	73
5.00	116	98	109	94	104	90	111	96	105	92	100	89	97	88	93	86	87	83	79	76
10.00	122	102	118	100	115	98	117	100	113	98	110	96	104	94	102	92	94	89	86	83

