


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81663N-LC

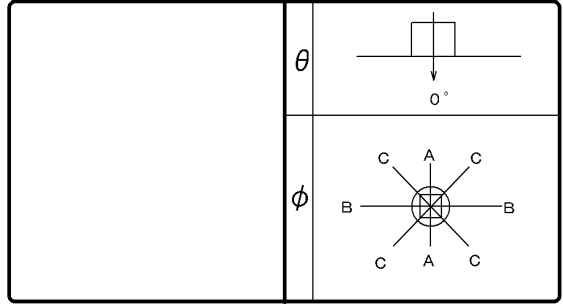

効 率	F $\frac{1}{2}$	9 %
	F $\frac{3}{4}$	91 %
	F \bigcirc	100 %
	器具 光束	3560 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	301	301	301
10°	296	296	296
20°	282	282	282
30°	258	258	258
40°	223	223	223
50°	180	180	180
60°	133	133	133
70°	89	89	89
80°	52	52	52
90°	28	28	28
100°	16	16	16
110°	12	12	12
120°	12	12	12
130°	14	14	14
140°	14	14	14
150°	14	14	14
160°	14	14	14
170°	11	11	11
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	固有照明率 ($\times 0.01$)																			
0.60	60	56	46	44	38	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27
0.80	72	66	58	54	49	47	69	63	56	53	48	46	53	51	46	44	44	43	38	36
1.00	79	71	65	60	56	53	76	69	63	59	54	52	60	56	52	50	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	59	57	56	55	50	47
1.50	92	81	79	72	70	65	88	78	76	70	68	63	71	67	64	61	61	59	54	51
2.00	100	87	89	79	80	73	95	84	85	77	78	72	80	74	73	69	69	66	62	59
2.50	105	90	95	84	86	78	100	88	91	82	84	76	84	78	79	74	74	71	66	63
3.00	108	93	99	87	92	82	103	90	95	85	89	80	88	81	83	77	78	74	70	67
4.00	113	96	105	91	99	87	108	93	101	89	95	85	93	85	89	82	83	79	75	72
5.00	116	98	109	94	104	90	110	95	105	92	100	88	96	88	92	85	86	82	78	75
10.00	122	102	118	99	115	97	116	99	113	97	110	95	103	93	101	92	93	88	85	81

