


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81767-LC

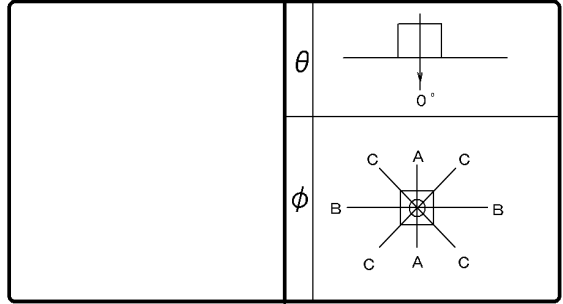

効 率	F $\frac{1}{2}$	8 %
	F $\frac{3}{4}$	92 %
	F $\bigcirc$	100 %
	器具 光束	3520 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	298	298	298
10°	296	296	296
20°	283	283	283
30°	261	261	261
40°	226	226	226
50°	184	184	184
60°	138	138	138
70°	91	91	91
80°	49	49	49
90°	21	21	21
100°	19	19	19
110°	16	16	16
120°	14	14	14
130°	12	12	12
140°	9	9	9
150°	7	7	7
160°	5	5	5
170°	3	3	3
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30						
室指数	固有照明率 (×0.01)																			
0.60	60	56	46	44	38	36	58	54	45	43	37	36	43	41	36	35	34	34	29	27
0.80	72	66	58	54	49	47	69	64	56	53	48	46	53	51	46	45	44	43	38	36
1.00	79	71	65	61	56	53	76	69	63	59	55	52	60	57	52	50	50	49	44	41
1.25	87	77	73	67	64	60	83	75	71	66	62	59	67	63	60	57	57	55	50	47
1.50	92	81	79	72	70	65	88	79	77	70	68	64	72	67	65	62	62	60	55	52
2.00	100	87	89	80	80	73	96	85	86	78	78	72	80	74	74	70	70	67	63	60
2.50	105	90	95	84	87	78	100	88	91	82	84	77	85	79	79	74	75	72	67	64
3.00	108	93	100	87	92	82	104	91	96	85	89	81	89	82	83	78	78	75	71	68
4.00	113	96	106	92	99	87	108	94	102	90	96	86	94	86	89	83	84	80	76	73
5.00	116	98	110	94	104	91	111	96	105	92	100	89	97	88	93	86	87	82	79	76
10.00	122	102	118	100	115	98	116	100	113	98	110	96	104	94	102	92	94	89	86	83

