


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81769-LC

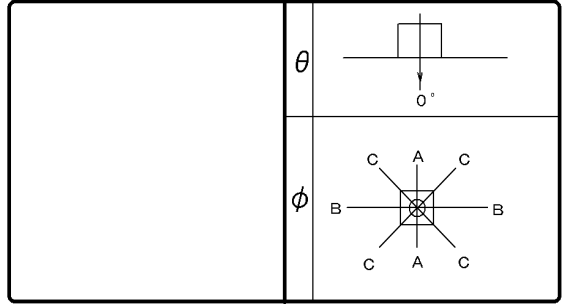

効 率	F	22%
	F	78%
	F	100%
	器具光束	3820 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	強化和紙
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	229	229	229
10°	226	226	226
20°	215	215	215
30°	196	196	196
40°	172	172	172
50°	144	144	144
60°	117	117	117
70°	91	91	91
80°	68	68	68
90°	51	51	51
100°	48	48	48
110°	44	44	44
120°	38	38	38
130°	31	31	31
140°	24	24	24
150°	16	16	16
160°	10	10	10
170°	4	4	4
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	57	52	42	40	34	33	54	50	41	39	33	32	37	36	30	30	28	28	23	20
0.80	68	61	53	50	44	42	64	59	51	48	42	41	47	44	39	38	36	36	31	27
1.00	74	67	60	56	50	48	70	64	57	54	49	46	52	50	45	43	42	41	35	32
1.25	82	73	68	62	58	54	77	69	65	60	56	53	59	55	51	49	47	46	40	37
1.50	87	76	73	67	64	59	82	73	70	64	61	57	63	59	56	53	52	50	44	40
2.00	95	82	83	74	74	67	89	79	79	71	71	65	71	66	64	61	59	57	51	46
2.50	100	86	89	79	80	72	93	82	84	76	77	70	76	70	70	65	63	61	55	50
3.00	103	88	94	82	85	76	97	85	89	79	81	74	79	73	74	69	67	64	59	54
4.00	108	92	100	86	93	82	101	88	94	83	88	79	84	77	80	73	72	68	63	58
5.00	111	94	104	89	98	85	104	90	98	86	93	82	87	80	83	77	75	71	66	61
10.00	117	98	113	96	109	93	110	95	107	92	103	90	95	86	92	84	82	78	74	68

