


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81770-LC

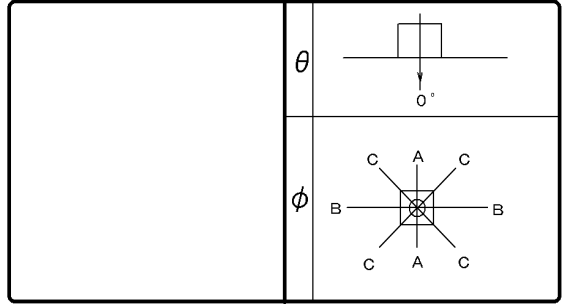

効 率	F	11 %
	F	89 %
	F	100 %
	器具光束	3750 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	強化和紙
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	273	273	273
10°	269	269	269
20°	256	256	256
30°	234	234	234
40°	205	205	205
50°	171	171	171
60°	134	134	134
70°	99	99	99
80°	67	67	67
90°	42	42	42
100°	28	28	28
110°	19	19	19
120°	14	14	14
130°	11	11	11
140°	9	9	9
150°	7	7	7
160°	5	5	5
170°	3	3	3
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	59	54	44	42	35	34	56	52	43	41	35	34	41	39	33	33	32	31	27	24
0.80	70	64	55	52	46	44	67	62	54	51	45	43	51	48	43	42	41	40	35	33
1.00	77	69	63	58	53	50	74	67	61	57	52	49	57	54	49	47	47	46	40	38
1.25	85	75	71	65	61	57	81	73	68	63	59	56	64	60	56	54	53	52	46	43
1.50	90	79	76	69	67	62	86	76	74	68	65	61	69	64	61	58	58	56	51	48
2.00	98	85	86	77	77	70	93	83	83	75	75	69	77	71	70	66	66	63	58	55
2.50	103	89	92	81	84	75	98	86	88	79	81	74	82	75	75	71	71	68	63	59
3.00	106	91	97	85	89	79	101	89	93	83	86	78	85	79	80	74	74	71	67	63
4.00	111	95	103	89	96	85	106	92	99	87	93	83	91	83	86	79	80	76	72	68
5.00	114	96	107	92	101	88	108	94	103	90	97	86	94	86	90	82	83	79	75	71
10.00	121	101	117	98	113	96	115	98	111	96	108	94	101	92	99	90	91	86	83	79

