


# 東芝照明器具配光データシート

|    |              |
|----|--------------|
| 名称 | LEDシーリングライト  |
| 形名 | LEDH82769-LC |

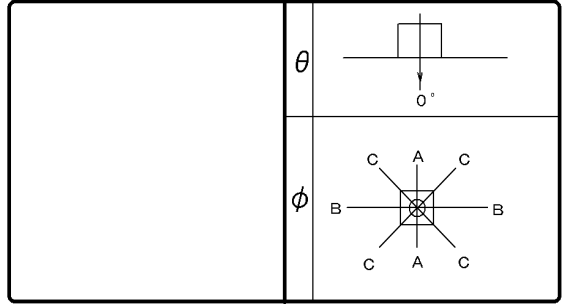

|        |          |         |
|--------|----------|---------|
| 効<br>率 | F        | 22 %    |
|        | F        | 78 %    |
|        | F        | 100 %   |
|        | 器具<br>光束 | 4760 lm |

|         |   |      |
|---------|---|------|
| 保守<br>率 | 良 | 0.63 |
|         | 中 | 0.60 |
|         | 否 | 0.56 |

|     |        |
|-----|--------|
| 前面  | 強化和紙   |
| 反射面 | 塗装 (白) |

| 最大取付間隔 |       |
|--------|-------|
| A-A    | 1.3 H |
| B-B    | 1.3 H |

備考

| 光度 (cd/1000lm)          |     |     |     |
|-------------------------|-----|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0°                      | 229 | 229 | 229 |
| 10°                     | 226 | 226 | 226 |
| 20°                     | 215 | 215 | 215 |
| 30°                     | 196 | 196 | 196 |
| 40°                     | 172 | 172 | 172 |
| 50°                     | 144 | 144 | 144 |
| 60°                     | 117 | 117 | 117 |
| 70°                     | 91  | 91  | 91  |
| 80°                     | 68  | 68  | 68  |
| 90°                     | 51  | 51  | 51  |
| 100°                    | 48  | 48  | 48  |
| 110°                    | 44  | 44  | 44  |
| 120°                    | 38  | 38  | 38  |
| 130°                    | 31  | 31  | 31  |
| 140°                    | 24  | 24  | 24  |
| 150°                    | 16  | 16  | 16  |
| 160°                    | 10  | 10  | 10  |
| 170°                    | 4   | 4   | 4   |
| 180°                    | 0   | 0   | 0   |

| 反射率 (%) | 天井            | 80 |     |    | 70  |    |     | 50 |     |    | 30  |    | 20 | 0  |    |    |    |    |    |    |
|---------|---------------|----|-----|----|-----|----|-----|----|-----|----|-----|----|----|----|----|----|----|----|----|----|
|         | 壁             | 70 | 50  | 30 | 70  | 50 | 30  | 50 | 30  | 30 | 30  | 10 | 0  |    |    |    |    |    |    |    |
|         | 床             | 30 | 10  | 30 | 10  | 30 | 10  | 30 | 10  | 30 | 10  | 30 | 10 | 0  |    |    |    |    |    |    |
| 室指数     | 固有照明率 (×0.01) |    |     |    |     |    |     |    |     |    |     |    |    |    |    |    |    |    |    |    |
| 0.60    | 57            | 52 | 42  | 40 | 34  | 33 | 54  | 50 | 41  | 39 | 33  | 32 | 37 | 36 | 30 | 30 | 28 | 28 | 23 | 20 |
| 0.80    | 68            | 61 | 53  | 50 | 44  | 42 | 64  | 59 | 51  | 48 | 42  | 41 | 47 | 44 | 39 | 38 | 36 | 36 | 31 | 27 |
| 1.00    | 74            | 67 | 60  | 56 | 50  | 48 | 70  | 64 | 57  | 54 | 49  | 46 | 52 | 50 | 45 | 43 | 42 | 41 | 35 | 32 |
| 1.25    | 82            | 73 | 68  | 62 | 58  | 54 | 77  | 69 | 65  | 60 | 56  | 53 | 59 | 55 | 51 | 49 | 47 | 46 | 40 | 37 |
| 1.50    | 87            | 76 | 73  | 67 | 64  | 59 | 82  | 73 | 70  | 64 | 61  | 57 | 63 | 59 | 56 | 53 | 52 | 50 | 44 | 40 |
| 2.00    | 95            | 82 | 83  | 74 | 74  | 67 | 89  | 79 | 79  | 71 | 71  | 65 | 71 | 66 | 64 | 61 | 59 | 57 | 51 | 46 |
| 2.50    | 100           | 86 | 89  | 79 | 80  | 72 | 93  | 82 | 84  | 76 | 77  | 70 | 76 | 70 | 70 | 65 | 63 | 61 | 55 | 50 |
| 3.00    | 103           | 88 | 94  | 82 | 85  | 76 | 97  | 85 | 89  | 79 | 81  | 74 | 79 | 73 | 74 | 69 | 67 | 64 | 59 | 54 |
| 4.00    | 108           | 92 | 100 | 86 | 93  | 82 | 101 | 88 | 94  | 83 | 88  | 79 | 84 | 77 | 80 | 73 | 72 | 68 | 63 | 58 |
| 5.00    | 111           | 94 | 104 | 89 | 98  | 85 | 104 | 90 | 98  | 86 | 93  | 82 | 87 | 80 | 83 | 77 | 75 | 71 | 66 | 61 |
| 10.00   | 117           | 98 | 113 | 96 | 109 | 93 | 110 | 95 | 107 | 92 | 103 | 90 | 95 | 86 | 92 | 84 | 82 | 78 | 74 | 68 |

