


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84771-LC

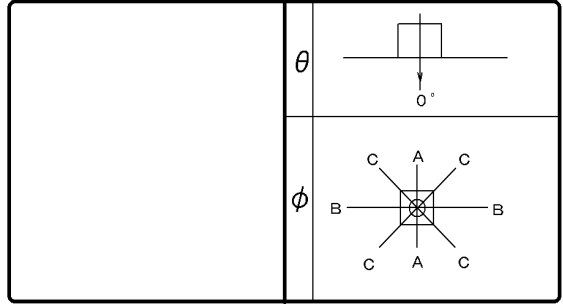

効 率	F	13%
	F	87%
	F	100%
	器具光束	4140 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	262	262	262
10°	260	260	260
20°	253	253	253
30°	235	235	235
40°	208	208	208
50°	173	173	173
60°	134	134	134
70°	94	94	94
80°	58	58	58
90°	32	32	32
100°	29	29	29
110°	25	25	25
120°	21	21	21
130°	17	17	17
140°	13	13	13
150°	10	10	10
160°	6	6	6
170°	3	3	3
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	0							
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	58	54	44	42	35	34	56	52	43	41	35	34	40	38	33	32	31	31	26	24
0.80	70	63	55	52	46	44	67	61	53	50	45	43	50	48	43	41	41	40	35	32
1.00	77	69	62	58	53	50	73	66	60	56	51	49	56	53	49	47	46	45	40	37
1.25	84	75	71	65	61	57	80	72	68	63	59	56	63	60	56	53	53	51	46	43
1.50	89	78	76	69	67	62	85	76	73	67	65	61	68	64	61	58	57	55	50	47
2.00	97	85	86	77	77	70	92	82	82	75	74	69	76	71	70	66	65	63	58	54
2.50	102	88	92	81	83	75	97	85	88	79	80	74	81	75	75	70	70	67	62	59
3.00	106	90	96	84	89	79	100	88	92	82	85	77	85	78	79	74	74	70	66	62
4.00	110	94	103	89	96	84	105	91	98	87	92	83	90	82	85	79	79	75	71	67
5.00	113	96	107	92	101	88	107	93	102	89	97	86	93	85	89	82	82	78	74	70
10.00	119	100	116	97	112	95	113	97	110	95	107	93	100	90	98	89	89	84	81	77

