


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH86588-LC

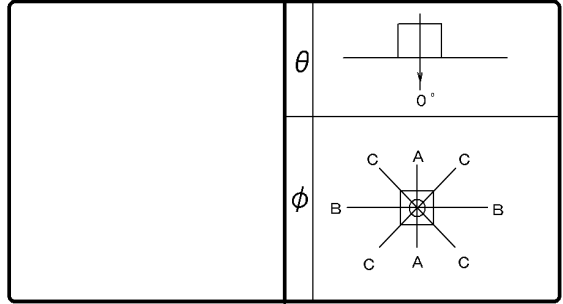

効 率	F	5 %
	F	95 %
	F	100 %
	器具 光束	5170 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	290	290	290
10°	286	286	286
20°	274	274	274
30°	253	253	253
40°	223	223	223
50°	187	187	187
60°	146	146	146
70°	104	104	104
80°	65	65	65
90°	34	34	34
100°	18	18	18
110°	7	7	7
120°	2	2	2
130°	1	1	1
140°	1	1	1
150°	1	1	1
160°	1	1	1
170°	1	1	1
180°	0	0	0

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																			
0.60	60	55	45	43	36	35	58	53	44	42	36	35	42	40	35	34	34	33	28	26
0.80	71	65	57	53	47	45	69	63	55	52	46	45	53	50	45	43	43	42	38	35
1.00	78	70	64	59	54	51	75	69	62	58	53	51	59	56	51	49	49	48	43	41
1.25	86	77	72	66	62	58	83	74	70	65	61	58	66	62	59	56	56	55	49	47
1.50	91	80	78	71	68	63	88	78	76	69	67	62	71	67	64	61	61	59	54	51
2.00	100	87	88	79	79	72	95	84	85	77	77	71	80	74	73	69	69	67	62	59
2.50	104	90	94	83	85	77	100	88	91	81	83	76	85	78	79	74	74	71	67	64
3.00	108	93	99	86	91	81	104	91	95	85	88	80	89	82	83	77	79	75	71	68
4.00	113	96	105	91	98	86	108	94	101	89	95	85	94	86	89	83	84	80	76	73
5.00	116	98	109	94	103	90	111	96	105	92	100	88	97	89	93	86	87	83	80	77
10.00	122	102	118	100	115	98	117	100	114	98	110	96	105	95	102	93	95	90	87	84

