


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81581-LC

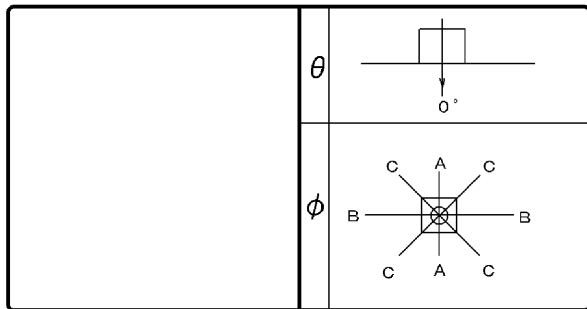

効 率	F $\frac{1}{2}$	13%
	F $\frac{3}{4}$	87%
	F $\bigcirc$	100%
	器具光束	3850 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	白色格子プラスチックカバー
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	282	282	282
10°	279	279	279
20°	266	266	266
30°	241	241	241
40°	205	205	205
50°	165	165	165
60°	128	128	128
70°	92	92	92
80°	60	60	60
90°	33	33	33
100°	29	29	29
110°	25	25	25
120°	21	21	21
130°	17	17	17
140°	13	13	13
150°	9	9	9
160°	7	7	7
170°	3	3	3
180°	0	0	0

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70		50		30		70		50		30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
	室指数	固有照明率 (×0.01)																			
	0.60	59	55	45	43	37	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25
	0.80	71	64	56	53	47	45	68	62	55	52	46	44	51	49	44	43	42	41	36	33
	1.00	78	70	64	59	54	51	74	67	61	57	53	50	57	54	50	48	47	46	41	38
	1.25	85	76	72	66	62	58	81	73	69	64	60	57	64	60	57	54	54	52	47	44
	1.50	90	79	77	70	68	63	86	77	74	68	66	62	69	65	62	59	58	56	51	48
	2.00	98	85	87	78	78	71	93	83	83	76	75	70	77	72	70	66	66	63	59	55
	2.50	103	89	93	82	84	76	98	86	89	80	81	74	82	76	76	71	71	68	63	59
	3.00	106	91	97	85	90	80	101	89	93	83	86	78	85	79	80	75	74	71	67	63
	4.00	111	95	104	90	97	85	106	92	99	87	93	83	90	83	86	79	79	76	72	68
	5.00	114	96	108	92	102	89	108	94	103	90	97	86	94	85	90	82	83	79	75	71
	10.00	120	101	117	98	113	96	114	98	111	96	108	94	101	91	98	89	90	85	82	78

