


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDT532L-G
光束	3900 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

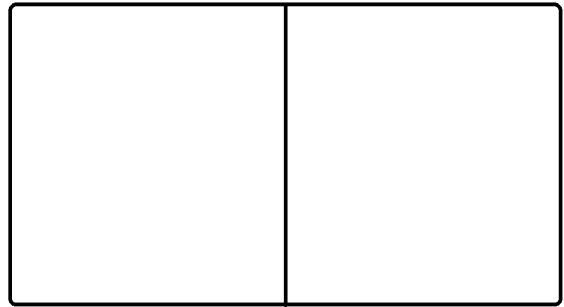

効率	F	%
	F	%
	F	100 %
	器具光束	3900 lm

最大取付間隔	
A-A	5.08 H
B-B	5.08 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	10		
10°	17		
20°	30		
30°	45		
40°	60		
50°	76		
60°	89		
70°	100		
80°	107		
90°	109		
100°	106		
110°	99		
120°	88		
130°	73		
140°	57		
150°	40		
160°	24		
170°	8		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																								
0.60	46	43	32	30	23	22	42	39	29	27	21	20	23	22	17	16	13	12	7	3					
0.80	56	51	40	38	30	29	50	46	36	34	27	26	29	28	22	22	17	17	11	6					
1.00	62	56	47	43	36	34	56	51	42	40	33	31	34	32	27	26	21	20	14	8					
1.25	70	62	54	50	43	41	62	56	49	45	39	37	40	37	32	31	25	24	18	11					
1.50	74	65	60	54	49	45	67	60	54	49	44	41	43	41	36	34	28	27	20	13					
2.00	82	72	69	62	58	53	74	65	62	56	53	49	50	47	43	41	34	33	25	17					
2.50	87	75	75	66	65	58	78	69	68	61	59	54	55	51	48	45	38	36	29	20					
3.00	91	78	80	70	70	63	82	72	72	64	64	58	58	54	52	49	41	39	32	23					
4.00	96	82	87	75	78	69	87	75	78	69	71	64	63	58	58	53	46	44	36	27					
5.00	100	84	91	78	84	73	90	78	82	72	76	67	67	61	62	57	49	47	39	29					
10.00	107	90	102	86	97	82	97	83	92	80	88	76	75	68	72	65	57	54	47	36					

