


東芝ランプ 配光データシート

名称	LEDランプ
形名	LDS71L-G-E 39
光束	8900 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

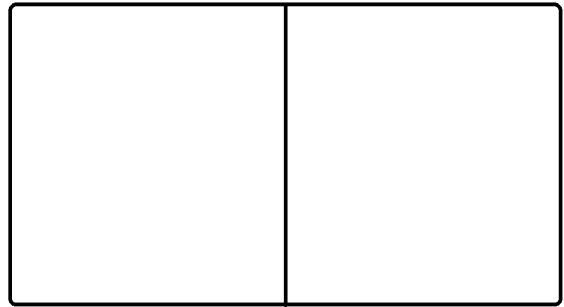

効率	F	%
	F	%
	F	100 %
	器具光束	8900 lm

最大取付間隔	
A-A	5.65 H
B-B	5.65 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	8		
10°	15		
20°	28		
30°	43		
40°	59		
50°	75		
60°	89		
70°	100		
80°	107		
90°	109		
100°	107		
110°	100		
120°	88		
130°	74		
140°	57		
150°	40		
160°	24		
170°	9		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	照明率 (×0.01)																								
0.60	46	43	32	30	23	22	42	39	29	27	20	20	23	22	16	16	12	12	7	3					
0.80	56	50	40	38	30	29	50	46	36	34	27	26	29	28	22	21	17	17	11	6					
1.00	62	56	47	43	36	34	56	51	42	39	33	31	34	32	27	26	21	20	14	8					
1.25	69	62	54	50	43	40	62	56	49	45	39	37	39	37	32	31	25	24	17	11					
1.50	74	65	59	54	48	45	66	59	54	49	44	41	43	41	36	34	28	27	20	13					
2.00	82	71	69	61	58	53	74	65	62	56	53	49	50	47	43	41	34	33	25	17					
2.50	87	75	75	66	65	58	78	69	68	61	59	54	54	50	48	45	38	36	29	20					
3.00	91	78	80	70	70	63	82	71	72	64	64	58	58	53	52	48	41	39	32	23					
4.00	96	82	86	75	78	69	87	75	78	69	71	63	63	58	58	53	46	43	36	26					
5.00	99	84	91	78	83	73	90	77	82	72	76	67	66	61	62	57	49	46	39	29					
10.00	107	90	102	86	97	82	97	83	92	80	88	76	75	67	71	65	57	54	47	36					

