


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-15011FL-LS9

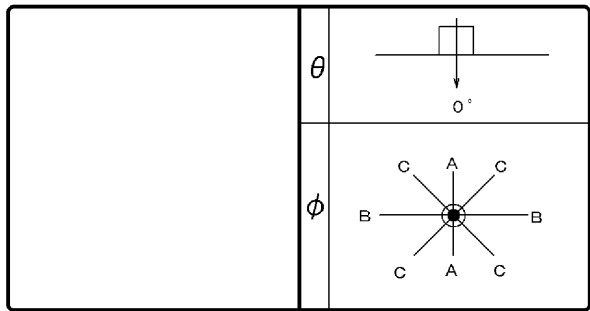

効 率	F \cap	0 %
	F \cup	100 %
	F \bigcirc	100 %
	器具 光束	1380 lm

保 守 率	良	0.76
	中	0.72
	否	0.64

前面	カバー (フロスト)
反射面	白色

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		472	
10°		468	
20°		452	
30°		411	
40°		320	
50°		202	
60°		81	
70°		27	
80°		6	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0		
	壁	床	70		50		30		70		50		30		50		30		10	0	
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		固有照明率 (×0.01)																			
0.60		71	65	58	55	50	49	69	64	57	55	50	49	56	54	49	48	49	48	44	42
0.80		84	76	72	67	64	61	82	75	71	67	63	61	69	65	62	60	61	60	56	54
1.00		91	81	79	73	71	67	88	80	78	72	70	67	75	71	69	66	67	65	62	60
1.25		98	87	87	80	79	74	95	86	85	79	78	74	82	77	76	73	74	72	68	67
1.50		102	90	92	84	85	79	99	89	90	83	83	78	87	81	81	77	79	76	73	71
2.00		110	95	101	90	94	86	106	94	99	89	92	85	94	87	89	84	86	83	80	78
2.50		113	98	106	93	100	90	110	97	103	93	97	89	98	91	94	88	90	86	84	82
3.00		116	100	110	96	104	93	113	98	107	95	102	92	101	93	97	90	93	89	87	85
4.00		120	102	114	99	110	96	116	101	111	98	107	96	105	96	102	94	97	92	90	88
5.00		122	103	117	101	113	99	118	102	114	100	109	98	107	98	104	96	99	94	92	90
10.00		126	106	124	104	121	103	122	104	120	103	117	102	112	101	110	100	104	98	97	95

