


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-21021FN-LS9

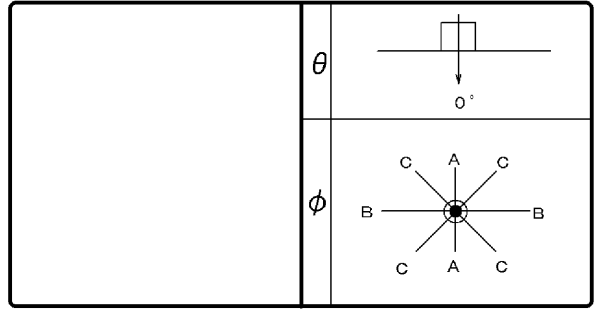

効 率	F \triangle	0 %
	F \cup	100 %
	F \circ	100 %
	器具光束	2020 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	カバー (フロスト)
反射面	白色

最大取付間隔	
A-A	1.23 H
B-B	1.23 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	429		
10°	421		
20°	398		
30°	350		
40°	293		
50°	221		
60°	189		
70°	27		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		固有照明率 (×0.01)																							
0.60	66	61	53	50	44	43	64	60	52	49	44	43	50	48	43	42	43	42	38	36					
0.80	79	72	66	62	57	55	77	71	65	61	57	55	63	60	56	54	55	53	49	48					
1.00	86	78	74	68	65	62	84	76	72	68	64	61	70	66	63	61	61	60	56	54					
1.25	94	84	82	75	74	69	91	82	81	75	73	69	77	73	71	68	69	67	63	61					
1.50	99	87	88	80	80	74	96	86	86	79	79	74	83	77	76	73	74	72	68	66					
2.00	107	93	98	87	90	82	104	92	95	86	89	82	91	84	85	80	82	79	76	74					
2.50	111	96	103	91	96	87	108	95	100	90	94	86	95	88	91	85	87	84	80	79					
3.00	115	98	107	94	101	90	111	97	104	93	99	90	99	91	95	88	91	87	84	82					
4.00	119	101	113	98	108	95	115	100	110	97	105	94	103	95	100	92	95	91	88	86					
5.00	121	102	116	100	112	97	117	101	113	99	109	96	106	97	103	95	98	93	91	89					
10.00	126	105	123	104	121	103	121	104	119	103	117	102	112	101	110	100	104	98	96	94					

