


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-09311MLV-LS9

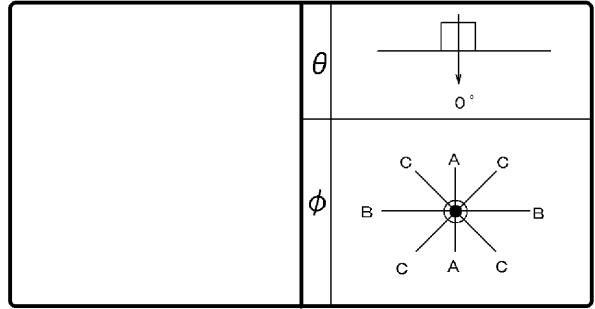

効 率	F ◡	0 %
	F ◢	100 %
	F ○	100 %
	器具光束	830 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	鏡面処理

最大取付間隔	
A-A	0.91 H
B-B	0.91 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1077		
10°	1073		
20°	924		
30°	480		
40°	189		
50°	33		
60°	2		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0			
室指数		固有照明率 (×0.01)																						
0.60	91	84	82	78	77	74	90	83	81	78	76	74	80	77	76	74	75	73	71	70				
0.80	102	93	94	88	89	85	100	92	93	88	88	85	91	87	87	84	86	84	82	81				
1.00	106	95	98	91	92	87	104	94	96	90	91	87	94	89	90	87	88	86	84	83				
1.25	109	97	102	93	96	90	107	96	100	93	95	90	97	91	93	89	91	88	86	85				
1.50	112	99	105	95	100	93	110	98	103	95	98	92	100	93	96	91	93	90	89	87				
2.00	116	101	110	98	105	96	113	100	108	98	103	95	104	96	100	94	97	93	91	90				
2.50	119	103	113	100	109	98	115	102	111	99	106	97	106	98	103	96	99	95	93	92				
3.00	121	104	116	101	111	99	117	102	113	100	109	99	107	99	104	97	100	96	94	93				
4.00	123	105	119	103	116	102	119	104	116	102	113	101	110	100	107	99	103	98	96	95				
5.00	125	106	121	104	118	103	121	104	118	103	115	102	111	101	109	101	104	99	97	96				
10.00	128	107	126	107	125	106	124	106	122	106	121	105	115	104	114	103	107	101	100	98				

