


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-21311MLV-LS9

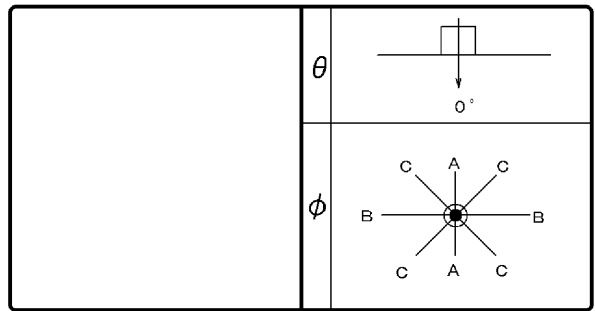

効 率	F ◡	0 %
	F ◩	100 %
	F ○	100 %
	器具光束	1520 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	下面開放
反射面	鏡面処理

最大取付間隔	
A-A	0.91 H
B-B	0.91 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1116		
10°	1100		
20°	916		
30°	480		
40°	183		
50°	33		
60°	2		
70°	0		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30		30	10	0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		固有照明率 (×0.01)																		
0.60	91	84	82	78	77	75	90	83	82	78	77	74	80	77	76	74	75	74	72	71
0.80	102	93	94	88	89	85	101	92	93	88	88	85	91	87	87	85	86	84	82	81
1.00	106	95	98	91	92	88	104	94	97	90	92	87	94	89	90	87	88	86	84	83
1.25	110	97	102	93	96	90	107	96	100	93	95	90	97	92	93	89	91	89	87	85
1.50	112	99	105	95	100	93	110	98	103	95	98	92	100	94	96	91	94	91	89	88
2.00	117	101	110	98	105	96	113	100	108	98	103	95	104	96	100	94	97	93	92	90
2.50	119	103	113	100	109	98	116	102	111	99	107	97	106	98	103	96	99	95	93	92
3.00	121	104	116	101	112	99	117	103	113	101	109	99	107	99	105	97	100	96	94	93
4.00	123	105	119	103	116	102	119	104	116	102	113	101	110	101	108	99	103	98	96	95
5.00	125	106	122	104	118	103	121	105	118	103	115	102	111	101	109	101	104	99	98	96
10.00	128	107	127	107	125	106	124	106	122	106	121	105	115	104	114	103	107	101	100	98

