


# 東芝照明器具配光データシート

名称	屋外用LEDブラケット
形名	LEDB83905

保守率	良	0.69
	中	0.67
	否	0.63

光源	名称	直管LEDランプ
	形名	LDM15SSL/8/6-01
	光束	670 lm × 1

効率	F	18%
	F	51%
	F	69%
	器具光束	460 lm

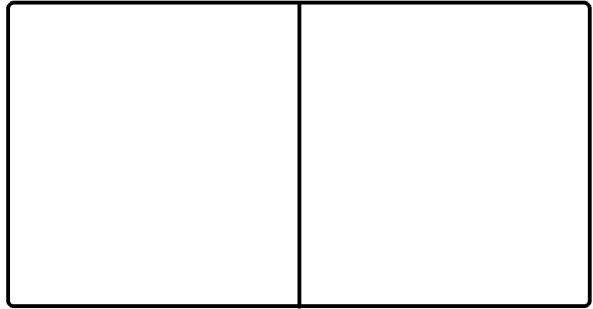

前面	グローブ (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.59 H
B-B	1.59 H

備考	

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	96		
10°	98		
20°	100		
30°	101		
40°	99		
50°	92		
60°	84		
70°	72		
80°	59		
90°	49		
100°	45		
110°	39		
120°	32		
130°	25		
140°	17		
150°	8		
160°	1		
170°	1		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10				
室指数	照明率 (×0.01)																																				
0.60	35	33	25	24	19	18	33	31	24	23	18	17	21	20	16	16	15	14	11	9																	
0.80	42	38	32	30	25	24	39	36	30	28	24	23	27	25	21	21	19	19	15	12																	
1.00	48	43	37	35	30	29	45	41	35	33	29	27	31	30	26	25	23	23	19	16																	
1.25	53	47	42	39	35	33	49	44	40	37	33	32	35	33	30	29	27	26	22	19																	
1.50	57	50	47	42	40	37	53	47	44	40	38	35	39	36	34	32	30	29	25	22																	
2.00	62	54	53	48	46	42	58	51	50	45	44	41	44	41	39	37	35	34	29	26																	
2.50	66	57	58	51	51	46	61	54	54	49	48	44	48	44	43	40	38	37	33	29																	
3.00	68	58	61	53	55	49	64	56	57	51	52	47	50	46	46	43	41	39	35	31																	
4.00	72	61	66	57	60	53	67	58	61	54	57	51	54	49	50	46	44	42	38	34																	
5.00	74	62	69	59	64	56	69	60	64	56	60	53	56	51	53	49	47	44	41	36																	
10.00	79	66	76	64	73	62	73	63	71	61	68	59	62	56	60	54	52	50	46	42																	

