


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84179W-LD

保守率	良	0.63
	中	0.60
	否	0.56

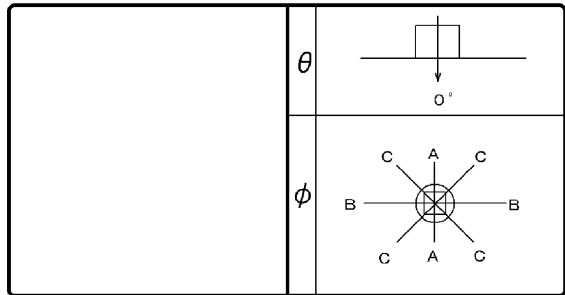

光源	名称	LED
	形名	LED
	光束	4400 lm × 1

効率	F	9%
	F	91%
	F	100%
	器具光束	4400 lm

最大取付間隔	
A-A	1.32 H
B-B	1.27 H

備考	
----	--

前面	カバー(乳白)
反射面	塗装(白)

θ \ φ	光度 (cd/1000lm)		
	A-A	B-B	C-C
0°	285	285	285
10°	282	281	281
20°	270	269	269
30°	250	248	248
40°	222	220	219
50°	185	183	183
60°	143	141	141
70°	97	96	96
80°	56	55	54
90°	27	26	26
100°	15	15	15
110°	12	13	12
120°	12	12	12
130°	12	12	12
140°	12	12	12
150°	12	12	12
160°	11	11	11
170°	12	12	12
180°	12	12	12

反射率 (%)	天井		80		70		50		30		20		0							
	壁	床	70	50	30	70	50	30	50	30	30	10	10	0						
室指数	照明率 (×0.01)																			
0.60	60	55	45	43	36	35	57	53	44	42	36	35	42	40	34	34	33	33	28	26
0.80	71	65	57	53	47	45	68	63	55	52	46	45	52	50	45	43	43	42	37	35
1.00	78	70	64	59	54	52	75	68	62	58	53	51	59	56	51	49	49	48	43	40
1.25	86	76	72	66	63	59	82	74	70	65	61	58	66	62	58	56	56	54	49	46
1.50	91	80	78	71	69	64	87	78	75	69	67	63	71	66	63	60	60	58	53	50
2.00	99	86	88	79	79	72	95	84	85	77	77	71	79	73	72	68	68	66	61	58
2.50	104	90	94	83	86	77	99	87	90	81	83	76	84	78	78	73	73	70	66	63
3.00	108	92	99	86	91	81	103	90	95	84	88	80	88	81	82	77	77	74	70	66
4.00	112	96	105	91	98	87	107	93	101	89	95	85	93	85	88	82	83	79	75	71
5.00	115	98	109	94	103	90	110	95	104	92	99	88	96	88	92	85	86	82	78	75
10.00	122	102	118	99	114	97	116	99	113	97	110	95	103	93	101	92	93	88	85	82

