


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81179W-LD

保守率	良	0.63
	中	0.60
	否	0.56

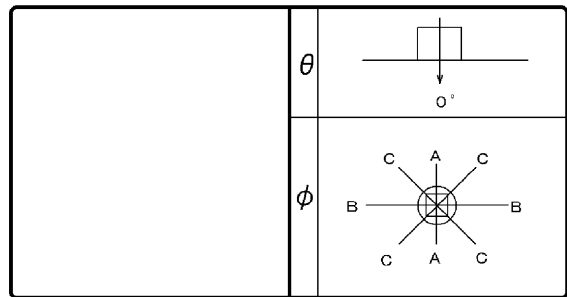

光源	名称	LED
	形名	LED
	光束	3800 lm x 1

効率	F $\frac{1}{2}$	9%
	F $\frac{3}{4}$	91%
	F \bigcirc	100%
	器具光束	3800 lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考	
----	--

前面	カバー(乳白)
反射面	塗装(白)

光度 (cd/1000lm)			
θ \ ϕ	A-A	B-B	C-C
0°	283	283	283
10°	280	279	279
20°	268	267	267
30°	248	246	247
40°	220	218	218
50°	184	182	182
60°	143	141	141
70°	98	97	97
80°	57	56	56
90°	28	28	28
100°	15	15	15
110°	12	13	12
120°	12	12	12
130°	12	12	12
140°	12	12	12
150°	12	11	12
160°	11	11	11
170°	12	12	12
180°	12	12	12

反射率 (%)	天井		80		70		50		30		20		0							
	壁	床	70	50	30	70	50	30	50	30	30	10	0							
室指数	照明率 (x0.01)																			
0.60	59	55	45	43	36	35	57	53	44	42	36	35	42	40	34	34	33	32	28	26
0.80	71	65	57	53	47	45	68	63	55	52	46	44	52	50	44	43	43	42	37	34
1.00	78	70	64	59	54	51	75	68	62	58	53	51	58	55	51	49	49	47	42	40
1.25	86	76	72	66	62	58	82	74	70	65	61	57	66	62	58	56	55	54	49	46
1.50	91	80	78	71	68	63	87	78	75	69	67	62	70	66	63	60	60	58	53	50
2.00	99	86	88	78	79	72	95	84	85	77	76	71	79	73	72	68	68	66	61	58
2.50	104	90	94	83	85	77	99	87	90	81	83	76	84	77	78	73	73	70	66	62
3.00	108	92	98	86	91	81	103	90	95	84	88	79	88	81	82	77	77	74	69	66
4.00	112	96	105	91	98	86	107	93	101	89	95	85	93	85	88	82	82	78	75	71
5.00	115	97	109	93	103	90	110	95	104	91	99	88	96	87	92	85	86	81	78	74
10.00	122	102	118	99	114	97	116	99	113	97	110	95	103	93	101	92	93	88	85	82

