


# 東芝照明器具配光データシート

名称	LED高天井用照明器具
形名	LEDJ-20027N-LDJ

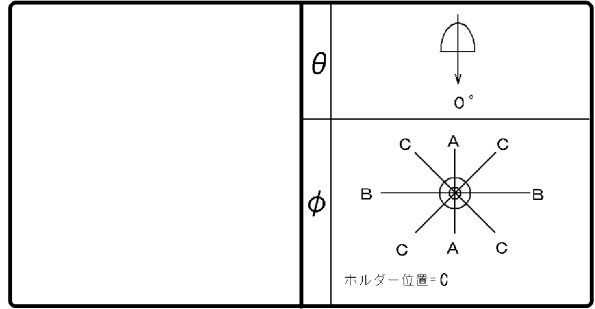

効 率	F	0 %
	F	100 %
	F	100 %
器具 光束		23000 lm

保 守 率	良	0.88
	中	0.86
	否	0.81

前面	カバー (透明)
反射面	レンズ (中角)

最大取付間隔	
A-A	0.83 H
B-B	0.83 H

初期照度補正機能付きです。光束・照度は記載値の約0.86倍です。

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1232		
10°	1131		
20°	906		
30°	465		
40°	90		
50°	50		
60°	28		
70°	22		
80°	7		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	50	30	30	10	30	10	30	10	10	0				
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0				
室指数	固有照明率 (×0.01)																							
0.60	90	83	81	77	76	73	89	82	81	77	75	73	79	76	75	73	74	73	70	69				
0.80	101	92	92	87	87	83	99	91	91	86	86	83	90	85	85	83	84	82	80	79				
1.00	104	94	96	89	90	85	102	93	94	88	89	85	92	87	88	85	86	84	82	81				
1.25	108	96	100	91	94	88	105	95	98	91	93	88	95	89	91	87	89	86	84	83				
1.50	111	97	103	93	97	90	108	96	101	93	96	90	98	91	93	89	91	88	86	85				
2.00	115	100	108	97	103	94	112	99	106	96	101	93	101	94	98	92	94	91	89	88				
2.50	118	101	111	98	106	96	114	100	109	98	104	95	104	96	100	94	97	93	91	89				
3.00	120	103	114	100	110	98	116	101	111	99	107	97	106	97	103	96	99	94	92	91				
4.00	122	104	118	102	114	100	119	103	115	101	111	100	109	99	106	98	101	97	95	93				
5.00	124	105	121	104	117	102	120	104	117	103	114	101	110	101	108	100	103	98	96	95				
10.00	128	107	126	107	125	106	124	106	122	105	121	105	114	103	113	103	107	101	100	98				

