


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81718X-LC

保守率	良	0.63
	中	0.60
	否	0.56

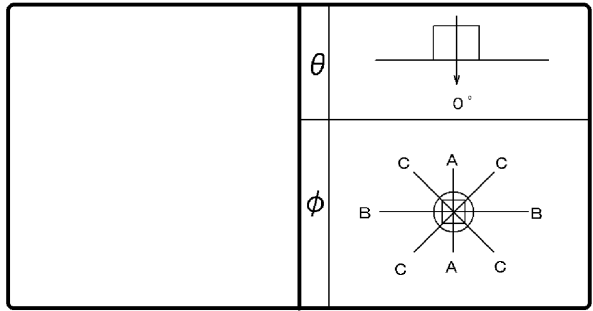

光源	名称	LED
	形名	LED
	光束	3800 lm x 1

効率	F	14%
	F	86%
	F	100%
	器具光束	3800 lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考	
----	--

前面	カバー (乳白)
反射面	塗装 (白)

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	281	281	281
10°	277	277	277
20°	264	262	263
30°	241	240	240
40°	211	209	209
50°	174	172	172
60°	133	131	131
70°	91	88	89
80°	51	48	49
90°	24	22	23
100°	15	14	14
110°	16	15	16
120°	20	20	20
130°	24	24	24
140°	27	26	27
150°	29	28	29
160°	30	30	30
170°	35	34	35
180°	36	36	36

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30			50	30	30	10	0		
床																				
室指数	照明率 (x0.01)																			
0.60	57	53	43	41	34	33	55	51	41	40	33	32	39	37	32	31	30	29	25	22
0.80	68	62	53	50	44	42	65	59	51	48	43	41	48	46	40	39	38	37	32	30
1.00	77	69	62	58	53	50	73	67	60	56	51	49	56	53	48	47	46	45	39	36
1.25	84	75	70	65	61	57	80	72	68	63	59	56	63	59	55	53	52	51	45	42
1.50	90	79	77	70	67	62	86	76	74	68	65	61	68	64	61	58	57	56	50	47
2.00	98	85	87	77	78	71	93	82	83	75	75	69	76	71	70	66	65	63	58	54
2.50	103	89	93	82	84	76	98	86	89	80	81	74	82	75	76	71	70	67	63	59
3.00	107	91	98	85	90	80	101	89	93	83	86	78	85	79	80	75	74	71	66	62
4.00	111	95	104	90	97	85	106	92	99	87	93	83	90	83	86	79	79	76	71	67
5.00	114	97	108	93	102	89	108	94	103	90	98	87	94	85	90	83	83	78	75	70
10.00	121	101	117	99	113	96	114	98	111	96	108	94	101	91	98	89	90	85	82	77

