


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81718XLC-LT3

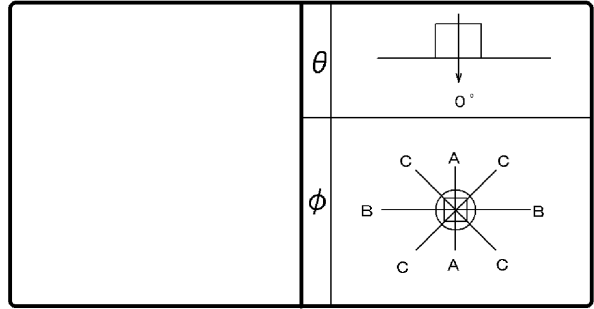

効 率	F $\triangle$	14 %
	F $\cup$	86 %
	F $\bigcirc$	100 %
	器具 光束	3800 lm

保 守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	279	279	279
10°	274	274	274
20°	261	259	260
30°	238	236	237
40°	208	205	207
50°	172	169	170
60°	132	128	130
70°	91	87	89
80°	52	50	51
90°	26	25	25
100°	16	16	16
110°	16	16	16
120°	21	21	21
130°	24	24	25
140°	27	27	27
150°	29	29	29
160°	31	31	31
170°	35	35	35
180°	37	37	37

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0
	室指数	固有照明率 (×0.01)																							
	0.60	59	55	45	43	37	35	57	52	44	42	36	35	41	39	34	33	32	32	27	25				
	0.80	71	64	56	53	47	45	68	62	55	52	46	44	51	49	44	42	42	41	36	33				
	1.00	78	70	64	59	54	51	74	67	61	57	53	50	57	54	50	48	47	46	41	38				
	1.25	85	76	72	66	62	58	81	73	69	64	60	57	64	60	57	54	54	52	47	44				
	1.50	90	79	77	70	68	63	86	77	74	68	66	62	69	65	62	59	58	56	51	48				
	2.00	98	86	87	78	78	72	94	83	84	76	76	70	77	72	71	67	66	63	59	55				
	2.50	103	89	93	82	85	77	98	86	89	80	82	75	82	76	76	71	71	68	63	59				
	3.00	107	91	98	86	90	80	101	89	93	83	87	78	85	79	80	75	74	71	67	63				
	4.00	111	95	104	90	98	86	106	92	99	87	93	84	90	83	86	80	79	76	71	67				
	5.00	114	97	108	93	102	89	108	94	103	90	98	87	94	85	90	82	82	78	74	70				
	10.00	120	101	117	98	113	96	114	98	111	96	108	94	100	91	98	89	90	85	81	77				

