


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH82598NLC-LT4

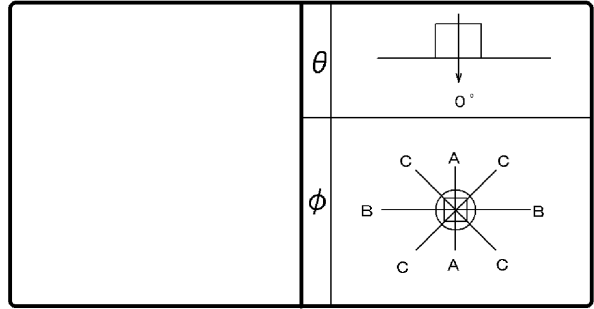

効率	F ◡	8 %
	F ◣	92 %
	F ○	100 %
	器具光束	4510 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta \backslash \phi$	A-A	B-B	C-C
0°	310	310	310
10°	305	305	305
20°	291	291	291
30°	265	265	265
40°	229	229	229
50°	184	184	184
60°	135	135	135
70°	86	86	86
80°	48	48	48
90°	23	23	23
100°	12	12	12
110°	12	12	12
120°	13	13	13
130°	13	13	13
140°	13	13	13
150°	13	13	13
160°	12	12	12
170°	10	10	10
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70		50		30		70		50		30		50		30		30		10		0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
	室指数	固有照明率 (×0.01)																							
	0.60	61	56	47	44	38	37	59	54	46	43	38	36	43	42	36	35	35	34	30	28				
	0.80	73	66	59	55	49	47	70	64	57	54	48	47	54	52	47	45	45	44	39	37				
	1.00	80	72	66	61	56	54	77	70	64	60	55	53	60	57	53	51	51	50	45	42				
	1.25	87	78	74	68	65	61	84	75	72	66	63	60	68	64	60	58	57	56	51	48				
	1.50	92	81	80	72	70	65	88	79	77	71	69	64	72	68	65	62	62	60	55	53				
	2.00	101	87	89	80	81	74	96	85	86	78	78	72	81	75	74	70	70	68	63	60				
	2.50	105	91	95	84	87	79	100	88	92	82	85	77	85	79	80	75	75	72	68	65				
	3.00	109	93	100	87	92	83	104	91	96	86	89	81	89	82	84	78	79	75	71	68				
	4.00	113	96	106	92	100	88	108	94	102	90	96	86	94	86	90	83	84	80	76	73				
	5.00	116	98	110	94	104	91	111	96	105	92	101	89	97	89	93	86	87	83	79	76				
	10.00	122	102	119	100	115	98	116	100	113	98	110	96	104	94	102	92	94	89	86	83				

