


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84746LC-LT4

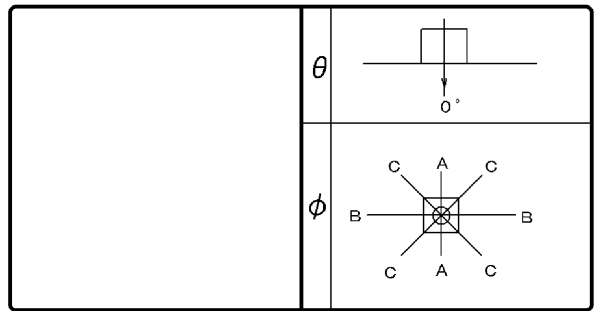

効 率	F ◡	17 %
	F ◩	83 %
	F ○	100 %
	器具光束	4070 lm

保守率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
θ \ φ	A-A	B-B	C-C
0°	279	279	279
10°	274	274	274
20°	260	260	260
30°	236	236	236
40°	205	205	205
50°	167	167	167
60°	125	125	125
70°	82	82	82
80°	43	43	43
90°	20	20	20
100°	18	18	18
110°	23	23	23
120°	27	27	27
130°	31	31	31
140°	35	35	35
150°	36	36	36
160°	35	35	35
170°	31	31	31
180°	0	0	0

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
	室指数	固有照明率 (×0.01)																						
	0.60	59	55	45	43	37	36	57	52	44	42	36	35	41	39	34	33	32	32	27	25			
	0.80	71	64	57	53	48	46	68	62	55	52	46	45	51	49	44	43	41	41	36	33			
	1.00	78	70	64	59	55	52	74	67	62	58	53	51	57	54	50	48	47	46	41	38			
	1.25	85	76	72	66	63	59	81	73	69	64	61	57	64	60	57	54	53	52	47	43			
	1.50	90	79	78	71	69	64	86	77	75	68	66	62	69	64	62	59	58	56	51	47			
	2.00	98	86	87	78	79	72	93	82	84	76	76	70	77	71	70	66	65	63	58	54			
	2.50	103	89	93	82	85	77	97	86	89	80	82	75	81	75	76	71	70	67	62	58			
	3.00	106	91	98	86	90	81	101	88	93	83	87	79	85	78	80	74	73	70	66	61			
	4.00	111	94	104	90	98	86	105	91	99	87	93	84	90	82	85	79	78	75	70	66			
	5.00	114	96	108	92	102	89	108	93	102	90	98	87	93	84	89	82	81	77	73	69			
	10.00	120	100	116	98	113	96	113	97	110	95	107	93	99	90	97	88	88	83	80	75			

