


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-60013MMW-LD9

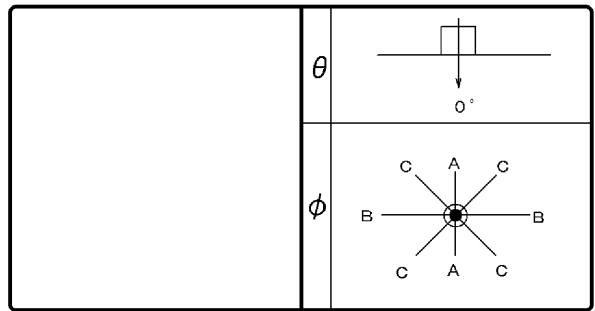

効率	F ◡	0 %
	F ◒	100 %
	F ○	100 %
器具光束		5200 lm

保守率	良	0.76
	中	0.72
	否	0.64

前面	梨地処理
反射面	下面開放

最大取付間隔	
A-A	0.79 H
B-B	0.79 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1325		
10°	1208		
20°	859		
30°	477		
40°	170		
50°	24		
60°	10		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	50	30	50	30	50	30	50	30	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0					
室指数		固有照明率 (×0.01)																						
0.60	92	84	83	79	78	75	90	84	82	79	77	75	81	78	77	75	76	74	72	71				
0.80	103	93	95	89	89	86	101	92	94	88	89	85	92	88	88	85	87	85	83	82				
1.00	106	95	98	91	92	88	104	94	97	90	92	87	94	89	90	87	89	86	84	83				
1.25	109	97	102	93	96	90	107	96	100	93	95	90	97	92	93	89	91	88	86	85				
1.50	112	99	105	95	100	93	109	98	103	95	98	92	100	93	96	91	93	90	88	87				
2.00	116	101	110	98	105	96	113	100	108	97	103	95	103	96	100	94	97	93	91	90				
2.50	119	102	113	100	108	98	115	101	110	99	106	97	105	97	102	96	99	95	93	91				
3.00	121	103	115	101	111	99	117	102	113	100	109	98	107	99	104	97	100	96	94	93				
4.00	123	105	119	103	115	102	119	104	116	102	113	101	110	100	107	99	103	98	96	95				
5.00	125	106	121	104	118	103	121	104	118	103	115	102	111	101	109	100	104	99	97	96				
10.00	128	107	127	107	125	106	124	106	122	106	121	105	115	104	114	103	107	101	100	99				

