


# 東芝照明器具配光データシート

|    |                   |
|----|-------------------|
| 名称 | LEDダウンライト         |
| 形名 | LEDD-60021MMW-LD9 |

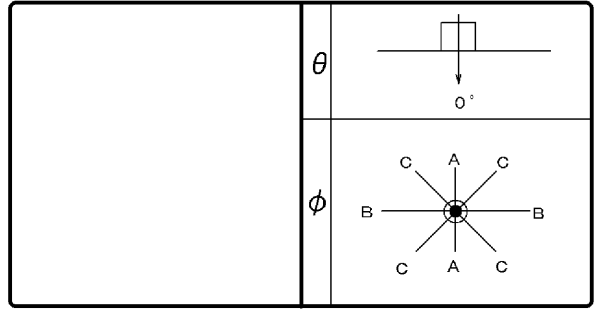

|          |     |         |
|----------|-----|---------|
| 効<br>率   | F ◡ | 0 %     |
|          | F ◒ | 100 %   |
|          | F ○ | 100 %   |
| 器具<br>光束 |     | 5100 lm |

|             |   |      |
|-------------|---|------|
| 保<br>守<br>率 | 良 | 0.76 |
|             | 中 | 0.72 |
|             | 否 | 0.64 |

|     |      |
|-----|------|
| 前面  | 梨地処理 |
| 反射面 | 下面開放 |

|        |        |
|--------|--------|
| 最大取付間隔 |        |
| A-A    | 1.13 H |
| B-B    | 1.13 H |

備考

| 光度 (cd/1000lm)          |     |     |     |
|-------------------------|-----|-----|-----|
| $\theta \setminus \phi$ | A-A | B-B | C-C |
| 0°                      | 695 |     |     |
| 10°                     | 670 |     |     |
| 20°                     | 629 |     |     |
| 30°                     | 535 |     |     |
| 40°                     | 337 |     |     |
| 50°                     | 85  |     |     |
| 60°                     | 18  |     |     |
| 70°                     | 1   |     |     |
| 80°                     | 0   |     |     |
| 90°                     | 0   |     |     |
| 100°                    | 0   |     |     |
| 110°                    | 0   |     |     |
| 120°                    | 0   |     |     |
| 130°                    | 0   |     |     |
| 140°                    | 0   |     |     |
| 150°                    | 0   |     |     |
| 160°                    | 0   |     |     |
| 170°                    | 0   |     |     |
| 180°                    | 0   |     |     |

| 反射率 (%) | 天井  |               |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     | 20  |     | 0   |     |    |    |
|---------|-----|---------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
|         | 壁   | 70            | 50  | 30  | 70  | 50  | 30  | 50  | 30  | 50  | 30  | 30  | 10  | 10  | 10  | 0   | 0   |     |    |    |
| 床       | 30  | 10            | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 30  | 10  | 10  | 0   |    |    |
| 室指数     |     | 固有照明率 (×0.01) |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0.60    | 81  | 74            | 70  | 66  | 63  | 61  | 79  | 73  | 69  | 66  | 63  | 61  | 68  | 65  | 62  | 61  | 62  | 60  | 58 | 56 |
| 0.80    | 93  | 85            | 83  | 78  | 77  | 74  | 92  | 84  | 82  | 78  | 76  | 73  | 80  | 77  | 75  | 73  | 74  | 72  | 70 | 68 |
| 1.00    | 99  | 89            | 89  | 83  | 83  | 78  | 97  | 88  | 88  | 82  | 82  | 78  | 85  | 81  | 80  | 77  | 79  | 77  | 74 | 73 |
| 1.25    | 105 | 93            | 95  | 88  | 89  | 83  | 102 | 92  | 94  | 87  | 88  | 83  | 91  | 86  | 86  | 82  | 84  | 81  | 79 | 78 |
| 1.50    | 108 | 95            | 100 | 91  | 94  | 87  | 105 | 94  | 98  | 90  | 92  | 87  | 95  | 89  | 90  | 86  | 88  | 85  | 82 | 81 |
| 2.00    | 114 | 99            | 107 | 95  | 101 | 92  | 111 | 98  | 104 | 95  | 99  | 92  | 100 | 93  | 96  | 91  | 93  | 90  | 87 | 86 |
| 2.50    | 117 | 101           | 111 | 98  | 105 | 95  | 114 | 100 | 108 | 97  | 103 | 94  | 103 | 95  | 99  | 93  | 96  | 92  | 90 | 88 |
| 3.00    | 119 | 102           | 114 | 99  | 109 | 97  | 116 | 101 | 111 | 99  | 106 | 96  | 105 | 97  | 102 | 95  | 98  | 94  | 92 | 90 |
| 4.00    | 122 | 104           | 117 | 102 | 113 | 100 | 118 | 103 | 114 | 101 | 111 | 99  | 108 | 99  | 105 | 97  | 101 | 96  | 94 | 92 |
| 5.00    | 124 | 105           | 120 | 103 | 116 | 101 | 120 | 103 | 116 | 102 | 113 | 100 | 110 | 100 | 107 | 99  | 102 | 97  | 95 | 94 |
| 10.00   | 127 | 106           | 125 | 105 | 123 | 104 | 123 | 105 | 121 | 104 | 119 | 103 | 113 | 102 | 112 | 101 | 105 | 100 | 98 | 96 |

