


東芝ランプ 配光データシート

名称	LED電球ミニクリプトン形
形名	LDA6L-H-E17 /S50W/2
光束	600 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

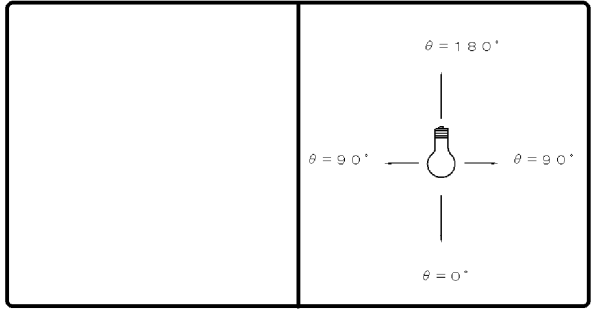

効率	F		%
	F		%
	F	100	%
	器具光束	600	lm

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考
データは初期の標準値です

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		302	
10°		297	
20°		282	
30°		258	
40°		225	
50°		185	
60°		143	
70°		104	
80°		71	
90°		45	
100°		28	
110°		17	
120°		10	
130°		6	
140°		4	
150°		2	
160°		1	
170°		0	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		50	30	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0		
室指数		照明率 (×0.01)																		
0.60	61	56	45	43	35	34	58	54	44	42	35	34	41	40	33	33	32	31	26	24
0.80	72	65	56	52	46	44	69	63	54	51	45	43	51	49	43	41	41	40	35	32
1.00	81	73	66	61	55	52	78	71	63	59	54	51	60	56	51	49	49	48	42	39
1.25	89	79	74	68	63	59	85	77	71	66	62	58	67	63	59	56	56	54	49	45
1.50	95	84	81	73	70	65	91	81	78	72	68	64	73	68	65	62	61	59	54	51
2.00	104	90	91	81	81	74	99	87	88	79	79	73	81	76	74	70	70	67	62	59
2.50	109	94	98	86	88	80	104	91	94	84	86	78	87	80	80	75	75	72	67	64
3.00	113	97	103	90	94	84	108	94	99	88	91	82	91	84	85	79	80	76	71	68
4.00	118	100	109	95	102	90	112	98	105	93	98	88	97	88	91	85	85	81	77	73
5.00	121	102	114	98	107	93	115	100	109	96	103	92	100	91	96	88	89	85	81	77
10.00	128	107	124	104	120	102	122	105	118	102	115	100	108	98	106	96	98	92	89	85

