


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDG87000L-LS

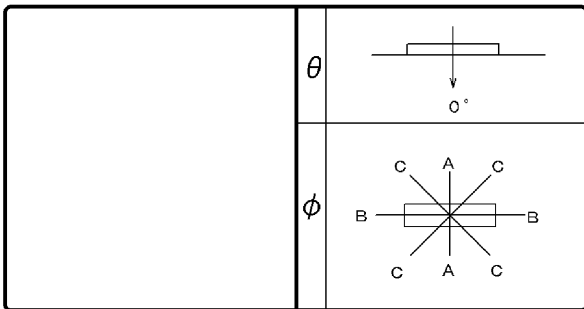

効率	F	15 %
	F	85 %
	F	100 %
	器具光束	500 lm

保守率	良	0.69
	中	0.67
	否	0.63

前面	
反射面	

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		320	
10°		319	
20°		310	
30°		284	
40°		223	
50°		138	
60°		81	
70°		71	
80°		60	
90°		48	
100°		39	
110°		30	
120°		22	
130°		16	
140°		12	
150°		9	
160°		5	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0
	壁	70		50		30		70		50		30		50		30		30		10		0		
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
	室指数	固有照明率 (×0.01)																						
	0.60	62	57	49	46	41	39	60	55	47	45	40	39	45	43	38	37	36	36	31	29			
	0.80	74	67	60	56	51	49	71	65	58	55	50	48	55	52	48	46	46	45	40	37			
	1.00	80	72	67	62	58	55	77	70	65	60	56	54	60	57	53	52	51	49	45	42			
	1.25	87	78	75	68	65	61	83	75	72	66	63	60	67	63	60	57	56	55	50	47			
	1.50	92	81	80	72	71	66	88	78	77	70	69	64	71	67	64	61	61	59	54	50			
	2.00	100	87	89	79	80	73	95	84	85	77	77	71	78	73	72	68	67	65	60	56			
	2.50	104	90	94	83	86	78	99	87	90	81	83	76	82	76	77	72	71	69	64	60			
	3.00	107	92	98	86	91	81	102	89	94	84	87	79	86	79	81	75	75	71	67	63			
	4.00	111	95	104	90	98	86	106	92	99	87	93	84	90	83	86	79	79	75	71	67			
	5.00	114	96	108	92	102	89	108	93	102	90	97	86	93	85	89	82	82	78	74	69			
	10.00	120	100	116	98	112	96	114	97	110	95	107	93	100	90	97	88	88	84	80	75			

