


東芝ランプ 配光データシート

名称	
形名	LDT S28N-G
光束	4000 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

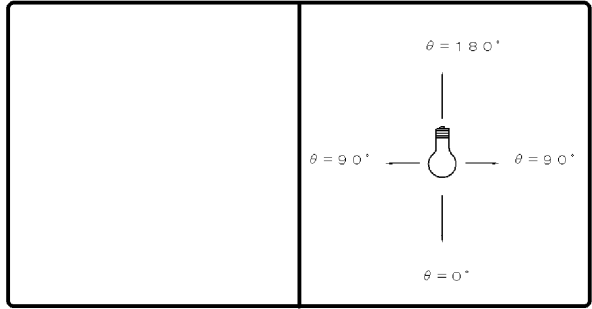

効 率	F		%
	F		%
	F	100	%
	器具 光束	4000	lm

最大取付間隔	
A-A	5.08 H
B-B	5.08 H

備考	
----	--

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		10	
10°		17	
20°		30	
30°		44	
40°		60	
50°		75	
60°		89	
70°		100	
80°		106	
90°		109	
100°		107	
110°		100	
120°		89	
130°		74	
140°		58	
150°		40	
160°		21	
170°		5	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30			50	30	10	0				
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照 明 率 (×0.01)																			
0.60		46	43	32	30	23	22	42	39	29	27	21	20	23	22	17	16	13	12	7	3
0.80		55	50	40	37	30	29	50	45	36	34	27	26	29	28	22	21	17	17	11	6
1.00		63	56	47	44	36	35	56	51	43	40	33	32	34	33	27	26	21	20	14	8
1.25		69	61	54	49	43	40	62	56	49	45	39	37	39	37	32	31	25	24	17	11
1.50		75	66	60	54	49	45	67	60	54	50	45	42	44	41	36	34	28	27	20	13
2.00		82	72	69	61	58	53	74	65	62	56	53	49	50	47	43	41	34	33	25	17
2.50		87	75	75	66	65	59	78	69	68	61	59	54	55	51	48	45	38	36	29	20
3.00		91	78	80	70	70	63	82	72	72	64	64	58	58	54	52	48	41	39	32	23
4.00		96	82	87	75	78	69	87	75	78	69	71	63	63	58	58	53	46	44	36	26
5.00		100	84	91	78	84	73	90	78	82	72	76	67	67	61	62	57	49	47	39	29
10.00		107	90	102	86	97	82	97	83	92	80	88	76	75	68	72	65	57	54	47	36

