


東芝照明器具配光データシート

名称	LED高天井器具
形名	LEDD-20025N-LDJ

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	22300 lm

保守 率	良	0.81
	中	0.81
	否	0.77

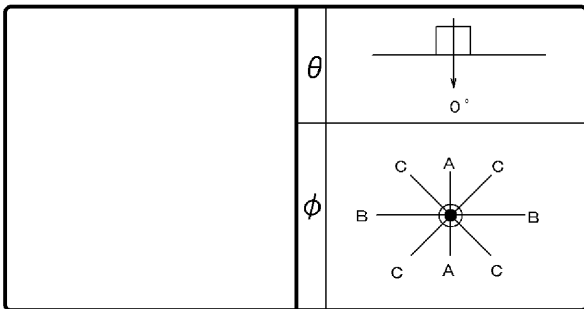

前面	カバー (透明)
反射面	レンズ (広角)

最大取付間隔	
A-A	1.32 H
B-B	1.32 H

備考
この器具は初期照度補正機能付器具です。光束・照度は記載値の0.86倍になります。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		499	
10°		506	
20°		479	
30°		448	
40°		366	
50°		152	
60°		56	
70°		20	
80°		7	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井	80						70						50						30		20		0
	壁	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	10	0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																							
0.60	73	67	61	58	54	52	72	66	60	57	53	52	59	57	53	51	52	51	47	46				
0.80	86	78	75	70	67	64	84	77	74	69	67	64	72	68	65	63	64	63	59	58				
1.00	93	83	82	76	74	70	90	82	80	75	73	70	78	74	72	69	70	68	65	63				
1.25	100	88	89	82	82	77	97	87	87	81	81	76	84	79	79	75	77	74	71	70				
1.50	104	92	94	86	87	81	101	90	92	85	86	80	89	83	83	79	81	78	75	74				
2.00	111	96	102	92	96	88	107	95	100	91	94	87	96	89	91	86	88	85	82	80				
2.50	114	99	107	95	101	91	111	97	104	94	99	90	99	92	95	89	92	88	85	84				
3.00	117	100	111	97	105	94	113	99	108	96	103	93	102	94	98	92	94	90	88	86				
4.00	120	102	115	100	111	97	116	101	112	99	108	96	106	97	103	95	98	93	91	89				
5.00	122	103	118	101	114	99	118	102	114	100	111	98	108	98	105	97	100	95	93	91				
10.00	126	106	124	104	121	103	122	104	120	103	118	102	112	101	110	100	104	98	97	95				

