


東芝照明器具配光データシート

名称	LED高天井器具
形名	LEDD-10017N-LDJ

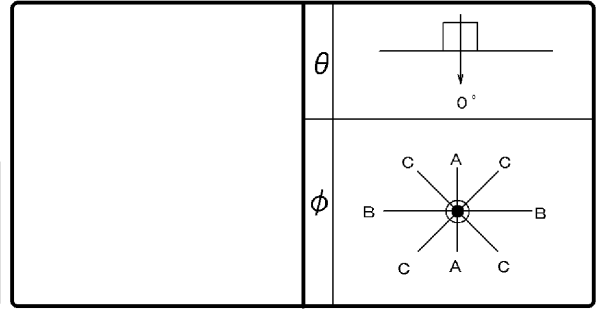

効 率	F $\frac{1}{2}$	0 %
	F $\frac{1}{4}$	100 %
	F \bigcirc	100 %
器具 光束		14950 lm

保 守 率	良	0.81
	中	0.81
	否	0.77

前面	カバー (透明)
反射面	レンズ (中角)

最大取付間隔	
A-A	0.75 H
B-B	0.75 H

備考
この器具は初期照度補正機能付器具です。光束・照度は記載値の0.86倍になります。

光度 (cd/1000lm)			
θ	ϕ	A-A	B-B C-C
0°		1506	
10°		1332	
20°		967	
30°		408	
40°		82	
50°		43	
60°		21	
70°		8	
80°		2	
90°		0	
100°		0	
110°		0	
120°		0	
130°		0	
140°		0	
150°		0	
160°		0	
170°		0	
180°		0	

反射率 (%)	天井		80				70				50				30		20		0	
	壁	床	70	50	30	70	50	30	50	30	50	30	30	10	30	10	10	0		
室指数	固有照明率 (×0.01)																			
0.60	94	86	86	81	80	78	93	86	85	81	80	78	84	80	79	77	79	77	75	74
0.80	104	95	96	90	91	88	102	94	95	90	91	87	94	89	90	87	89	87	85	84
1.00	107	96	99	92	94	89	105	95	98	91	93	89	96	91	91	88	90	88	86	85
1.25	110	98	102	94	97	91	107	97	101	93	96	91	98	92	94	90	92	89	87	86
1.50	112	99	105	96	100	93	110	98	103	95	99	92	100	94	96	92	94	91	89	88
2.00	116	101	110	98	105	96	113	100	108	97	103	95	103	96	100	94	97	93	91	90
2.50	119	102	113	100	108	98	115	101	110	99	106	97	105	97	102	96	99	95	93	91
3.00	121	103	115	101	111	99	117	102	112	100	109	98	107	99	104	97	100	96	94	93
4.00	123	105	119	103	116	102	119	104	116	102	113	101	110	100	107	99	103	98	96	95
5.00	125	106	122	104	119	103	121	105	118	103	115	102	111	102	109	101	104	99	98	96
10.00	129	108	127	107	126	107	124	106	123	106	122	106	115	104	114	104	108	102	101	99

