


東芝ランプ 配光データシート

名称	東芝LED電球ミニクリプトン形
形名	LDA5N-G-E17 / S/40W
光束	440 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

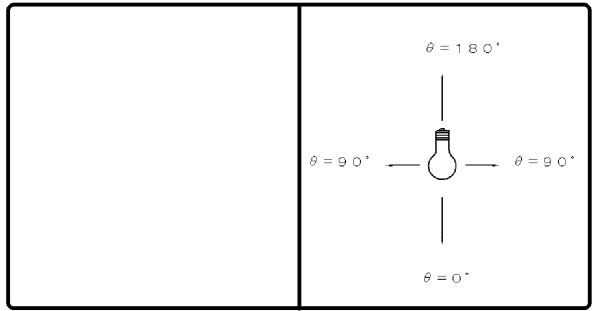

効率	F		%
	F		%
	F	100	%
	器具光束	440	lm

最大取付間隔	
A-A	1.48 H
B-B	1.48 H

備考
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	162		
10°	161		
20°	161		
30°	160		
40°	158		
50°	153		
60°	143		
70°	127		
80°	107		
90°	84		
100°	62		
110°	43		
120°	28		
130°	17		
140°	10		
150°	5		
160°	3		
170°	0		
180°	0		

反射率 (%)	天井	80				70				50				30		20		0		
	壁	70	50	30		70	50	30		50	30		30	10	0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	
室指数		照明率 (×0.01)																		
0.60	55	50	38	36	29	28	52	48	37	35	27	27	33	32	25	25	23	23	17	14
0.80	65	59	48	45	38	36	61	56	46	43	36	35	42	40	33	32	30	30	24	20
1.00	74	66	57	53	46	43	70	63	54	51	44	42	49	47	40	39	37	36	30	26
1.25	81	72	65	60	54	50	76	69	62	57	51	49	56	53	47	45	43	42	35	31
1.50	87	77	72	65	60	56	82	73	68	63	58	54	61	58	53	50	48	47	40	36
2.00	96	84	82	73	71	65	90	80	78	70	68	63	70	65	62	58	56	54	48	43
2.50	102	88	89	79	79	71	95	84	84	76	75	68	75	70	68	64	62	59	53	48
3.00	106	91	94	83	85	75	99	87	89	79	80	73	80	73	73	68	66	63	57	51
4.00	111	95	102	88	93	82	104	91	96	85	88	79	86	78	80	74	72	68	62	57
5.00	115	97	106	91	99	86	108	93	100	88	94	83	89	81	84	77	76	72	66	61
10.00	123	103	118	99	113	96	115	99	111	96	107	93	99	89	95	86	85	81	76	70

