


# 東芝ランプ 配光データシート

名称	LEDユニットフラット
形名	LDF7LHGX53/ C7/700
光束	700 lm × 1

保守率	良	1.00
	中	1.00
	否	1.00

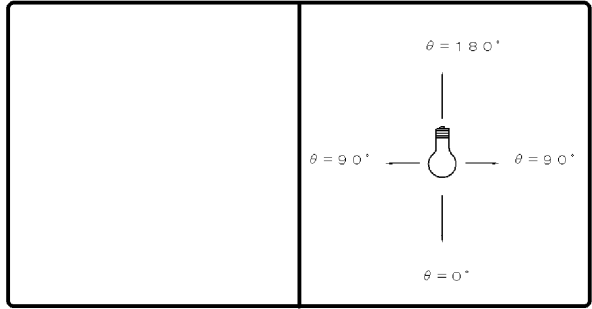

効率	F		%
	F		%
	F	100	%
	器具光束	700	lm

最大取付間隔	
A-A	1.18 H
B-B	1.18 H

備考  
データは初期の標準値です。

光度 (cd/1000lm)			
$\theta$	$\phi$	A-A	B-B C-C
0°		358	
10°		350	
20°		327	
30°		289	
40°		240	
50°		185	
60°		132	
70°		83	
80°		41	
90°		16	
100°		13	
110°		11	
120°		10	
130°		9	
140°		7	
150°		5	
160°		3	
170°		1	
180°		0	

反射率 (%)	天井	80				70				50				30		20		0			
	壁	70	50	30		70	50	30		50	30		50	30		30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0		
室指数		照明率 (×0.01)																			
0.60		63	58	49	47	41	39	61	56	48	46	40	39	46	44	39	38	38	37	33	31
0.80		75	68	61	57	52	50	73	66	60	56	51	49	57	54	50	48	48	47	43	40
1.00		82	74	68	63	59	56	79	72	67	62	58	55	63	60	56	54	54	53	48	46
1.25		90	80	77	70	67	63	86	78	74	69	66	62	71	66	63	61	61	59	54	52
1.50		94	83	82	75	73	68	91	81	80	73	72	67	75	71	68	65	66	63	59	56
2.00		103	89	92	82	83	76	98	87	89	81	81	75	84	78	77	73	74	71	67	64
2.50		107	92	98	86	90	81	103	90	94	85	87	80	88	82	83	77	78	75	71	68
3.00		111	95	102	89	95	85	106	93	98	88	92	83	92	85	87	81	82	79	75	72
4.00		115	98	108	94	102	90	110	96	104	92	99	88	97	89	93	86	87	83	80	77
5.00		118	100	112	96	107	93	113	98	108	94	103	91	100	91	96	88	90	86	83	80
10.00		124	103	120	101	117	100	118	101	115	100	113	98	106	96	104	95	97	92	89	86

