


## 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-21111L-LD9

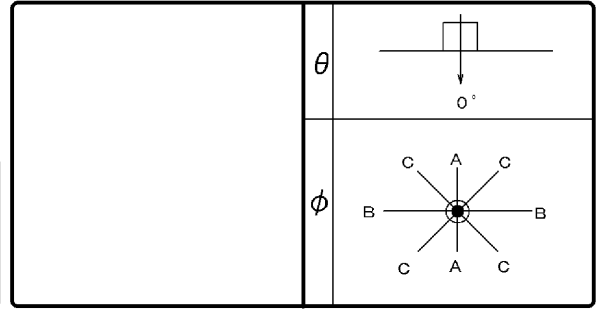

効率	F	0%	保守率	良	0.67
	F	100%		中	0.63
	F	100%		否	0.56
器具光束		1250 lm	最大取付間隔		

前面	カバー (フロスト)	A-A	1.18 H	備考
反射面	白色	B-B	1.18 H	

θ	φ	光度 (cd/1000lm)		
		A-A	B-B	C-C
0°		522		
10°		508		
20°		469		
30°		411		
40°		322		
50°		201		
60°		71		
70°		22		
80°		6		
90°		0		
100°		0		
110°		0		
120°		0		
130°		0		
140°		0		
150°		0		
160°		0		
170°		0		
180°		0		

反射率 (%)	天井			壁						床																																												
	80			70						50						30	20	0																																				
	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50	30	70	50																			
	室指数																											固有照明率 (×0.01)																										
0.60	72	66	59	56	52	50	70	65	59	56	52	50	57	55	51	50	50	49	45	44	72	66	59	56	52	50	70	65	59	56	52	50	57	55	51	50	50	49	45	44														
0.80	85	77	73	68	65	63	83	76	72	68	65	62	70	67	64	62	62	61	57	56	85	77	73	68	65	63	83	76	72	68	65	62	70	67	64	62	62	61	57	56														
1.00	92	82	80	74	72	69	89	81	79	74	71	68	76	72	70	67	69	67	63	62	92	82	80	74	72	69	89	81	79	74	71	68	76	72	70	67	69	67	63	62														
1.25	99	88	88	81	80	75	96	86	86	80	79	75	83	78	77	74	75	73	70	68	99	88	88	81	80	75	96	86	86	80	79	75	83	78	77	74	75	73	70	68														
1.50	103	91	93	85	86	80	100	90	91	84	84	79	88	82	82	78	80	77	74	72	103	91	93	85	86	80	100	90	91	84	84	79	88	82	82	78	80	77	74	72														
2.00	110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79	110	96	102	91	95	87	107	95	99	90	93	86	95	88	90	85	87	84	81	79														
2.50	114	98	106	94	100	90	110	97	104	93	98	90	99	91	94	88	91	87	84	83	114	98	106	94	100	90	110	97	104	93	98	90	99	91	94	88	91	87	84	83														
3.00	117	100	110	96	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	85	117	100	110	96	105	93	113	99	107	96	102	93	102	94	98	91	94	90	87	85														
4.00	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	97	93	91	89	120	102	115	99	110	97	116	101	112	98	107	96	105	96	102	94	97	93	91	89														
5.00	122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91	122	104	118	101	114	99	118	102	114	100	111	98	108	98	105	96	100	95	93	91														
10.00	127	106	124	105	122	103	122	105	120	104	118	102	112	101	111	100	104	99	97	95	127	106	124	105	122	103	122	105	120	104	118	102	112	101	111	100	104	99	97	95														

