


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-95031MW-LD9

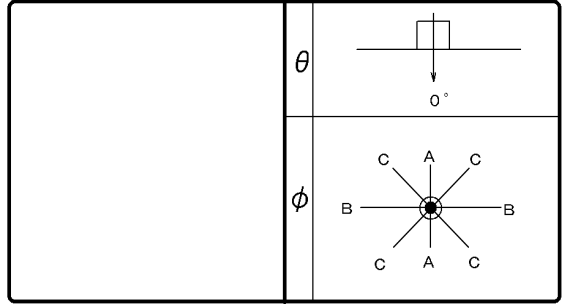

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	7500 lm

保守率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	540		
10°	528		
20°	515		
30°	479		
40°	354		
50°	167		
60°	41		
70°	3		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0								
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0	30	10	0					
室指数	固有照明率 (×0.01)																																							
0.60	75	69	63	60	56	54	73	68	62	60	56	54	61	59	55	54	54	53	50	48																				
0.80	88	80	77	72	70	67	86	79	76	72	69	67	74	71	68	66	67	65	62	61																				
1.00	95	85	84	78	76	73	92	84	82	77	76	72	80	76	74	72	73	71	68	66																				
1.25	101	90	91	84	84	79	99	89	90	83	83	78	87	82	81	78	79	77	74	72																				
1.50	105	93	96	87	89	83	103	92	94	87	88	83	91	85	86	82	83	81	78	76																				
2.00	112	98	104	93	98	90	109	96	102	92	96	89	98	91	93	88	90	87	84	83																				
2.50	116	100	109	96	103	93	112	98	106	95	101	92	101	93	97	91	93	90	87	86																				
3.00	118	101	112	98	107	95	114	100	109	97	104	95	104	95	100	93	96	92	90	88																				
4.00	121	103	116	101	112	98	117	102	113	100	109	98	107	98	104	96	99	94	92	91																				
5.00	123	104	119	102	115	100	119	103	115	101	112	99	109	99	106	98	101	96	94	92																				
10.00	127	106	124	105	122	104	122	105	120	104	118	103	121	102	111	101	105	99	97	95																				

