


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-75011MW-LD9

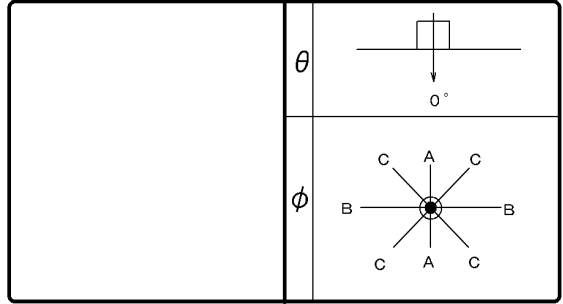

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	5970 lm

保守率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	1.13 H
B-B	1.13 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	671		
10°	636		
20°	580		
30°	511		
40°	334		
50°	109		
60°	34		
70°	5		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30						20						0					
	壁	70		50		30		70		50		30		50		30		30		10		0		30		10		0		10		0					
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室指数	固有照明率 (×0.01)																																				
0.60	79	72	67	64	61	59	77	71	67	64	60	59	65	63	60	58	59	58	55	53																	
0.80	91	83	81	76	74	71	89	82	80	75	73	71	78	74	72	70	71	70	67	65																	
1.00	97	87	87	81	80	76	95	86	86	80	79	76	83	79	78	75	76	74	71	70																	
1.25	103	92	94	86	87	81	101	90	92	85	86	81	89	84	84	80	82	79	77	75																	
1.50	107	94	98	89	92	85	104	93	96	88	90	85	93	87	88	84	86	83	80	79																	
2.00	113	98	106	94	100	91	110	97	103	93	98	90	99	92	95	89	92	88	86	84																	
2.50	116	100	110	97	104	94	113	99	107	96	102	93	102	94	98	92	95	91	89	87																	
3.00	119	102	113	99	108	96	115	100	110	98	105	95	104	96	101	94	97	93	91	89																	
4.00	122	103	117	101	113	99	118	102	113	100	110	98	107	98	105	97	100	95	93	92																	
5.00	123	104	119	102	116	101	119	103	116	101	112	100	109	99	107	98	101	96	95	93																	
10.00	127	106	125	105	123	104	122	105	120	104	119	103	113	102	111	101	105	99	98	96																	

