


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-75013MW-LD9

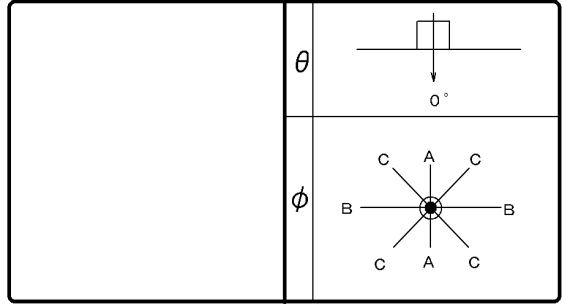

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	6000 lm

保守率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.79 H
B-B	0.79 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1202		
10°	1113		
20°	812		
30°	474		
40°	217		
50°	33		
60°	10		
70°	4		
80°	1		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20	0
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0						
室指数	固有照明率 (×0.01)																						
0.60	90	82	80	76	75	73	88	82	80	76	74	72	78	75	74	72	73	72	69	68			
0.80	101	91	92	87	87	83	99	91	91	86	86	83	90	85	85	83	84	82	80	79			
1.00	104	94	96	89	91	86	102	93	95	89	90	86	93	88	88	85	87	84	82	81			
1.25	108	96	100	92	95	89	106	95	99	92	94	89	96	90	92	88	90	87	85	84			
1.50	111	98	104	94	98	91	109	97	102	94	97	91	99	92	95	90	92	89	87	86			
2.00	116	101	109	98	104	95	113	100	107	97	102	95	103	95	99	93	96	92	90	89			
2.50	118	102	113	99	108	97	115	101	110	99	106	97	105	97	102	95	98	94	92	91			
3.00	120	103	115	101	111	99	117	102	112	100	108	98	107	98	104	97	100	95	94	92			
4.00	123	105	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94			
5.00	125	105	121	104	118	103	120	104	117	103	115	102	111	101	109	100	104	99	97	95			
10.00	128	107	126	106	125	106	124	106	122	105	121	105	114	103	113	103	107	101	100	98			

