


東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD-75023MN-LD9

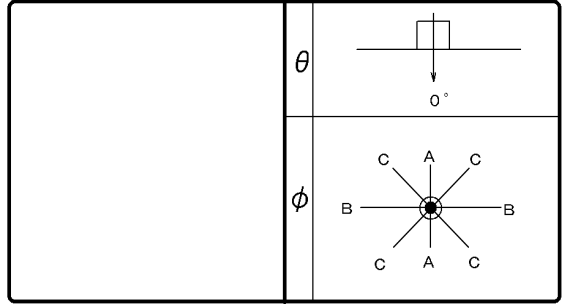

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	7650 lm

保守率	良	0.81
	中	0.77
	否	0.68

前面	下面開放
反射面	梨地処理

最大取付間隔	
A-A	0.87 H
B-B	0.87 H

備考

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	1072		
10°	1010		
20°	782		
30°	483		
40°	255		
50°	43		
60°	7		
70°	2		
80°	0		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	88	81	78	74	73	70	86	80	78	74	72	70	76	73	71	70	71	69	67	66					
0.80	99	90	91	85	85	82	98	89	90	85	84	81	88	84	83	81	82	80	78	77					
1.00	103	93	95	88	89	85	101	92	94	88	88	84	91	87	87	84	85	83	81	80					
1.25	108	96	100	91	94	88	105	95	98	91	93	88	95	90	91	87	89	86	84	83					
1.50	111	98	103	94	98	91	108	97	101	93	96	90	98	92	94	89	92	89	86	85					
2.00	116	101	109	97	104	95	113	100	107	97	102	94	102	95	99	93	96	92	90	89					
2.50	118	102	112	99	108	97	115	101	110	98	105	96	105	97	101	95	98	94	92	91					
3.00	120	103	115	101	111	99	117	102	112	100	108	98	107	98	104	97	100	95	93	92					
4.00	123	104	119	103	115	101	119	103	115	102	112	100	109	100	107	99	102	97	96	94					
5.00	124	105	121	104	118	102	120	104	117	103	115	102	111	101	109	100	103	98	97	95					
10.00	128	107	126	106	124	106	123	106	122	105	120	105	114	103	113	103	107	101	100	98					

