


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDB83112N

保守率	良	0.88
	中	0.86
	否	0.81

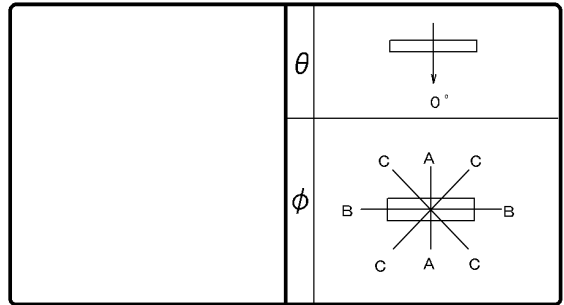

光源	名称	LEDランプ
	形名	LDL40T・L/25 /20
	光束	2000 lm × 1

効率	F	23%
	F	26%
	F	49%
	器具光束	975 lm


最大取付間隔		
A-A	*. * H	
B-B	*. * H	

備考  
取付姿勢は天井面取付の配光図です  
初期照度補正はありません

前面	
反射面	

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	0	0	0
10°	9	0	6
20°	22	0	14
30°	37	0	23
40°	55	0	33
50°	74	0	43
60°	89	0	53
70°	97	0	59
80°	99	0	61
90°	95	0	59
100°	89	0	56
110°	80	0	50
120°	69	1	44
130°	57	1	36
140°	44	1	27
150°	31	1	18
160°	20	1	11
170°	9	1	5
180°	1	2	1

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	50	30	30	10	0						
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0					
室指数	照明率 (×0.01)																			
0.60	22	20	15	14	10	10	20	18	13	13	9	9	11	10	8	7	6	6	3	1
0.80	27	24	19	18	14	13	24	22	17	16	13	12	14	13	10	10	8	8	5	3
1.00	30	27	22	21	17	16	27	24	20	19	16	15	16	15	13	12	10	10	6	4
1.25	34	30	26	24	21	19	30	27	24	22	19	18	19	18	15	15	12	12	8	5
1.50	36	32	29	26	23	21	32	29	26	24	21	20	21	20	17	16	14	13	10	6
2.00	40	35	33	30	28	25	36	32	30	27	26	24	24	23	21	20	17	16	12	9
2.50	42	37	36	32	31	28	38	34	33	29	28	26	27	25	23	22	19	18	14	10
3.00	44	38	39	34	34	30	40	35	35	31	31	28	29	26	25	24	20	19	16	12
4.00	47	40	42	36	38	33	42	37	38	34	35	31	31	28	28	26	23	22	18	14
5.00	49	41	44	38	41	35	44	38	40	35	37	33	33	30	30	28	24	23	20	15
10.00	52	44	50	42	47	40	47	41	45	39	43	37	37	33	35	32	29	27	24	19

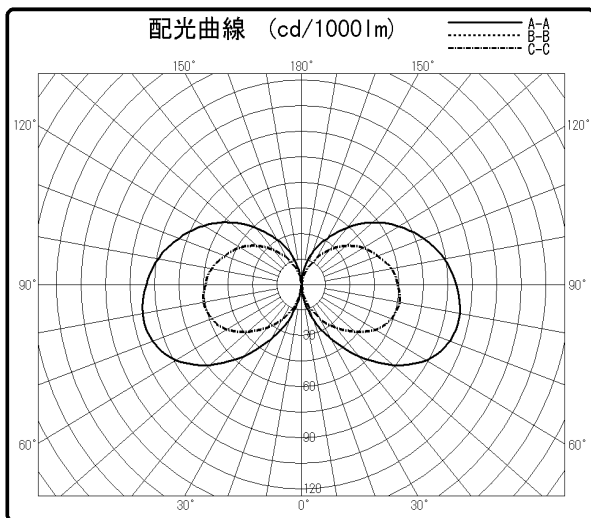

[高さ (m)]	[単位 lx]							初期値	
0									
1									
2									
3									
4									
5									
	4	3	2	1	0	1	2	3	4
	A-A			[水平距離 (m)]				B-B	