


東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH81800-LC

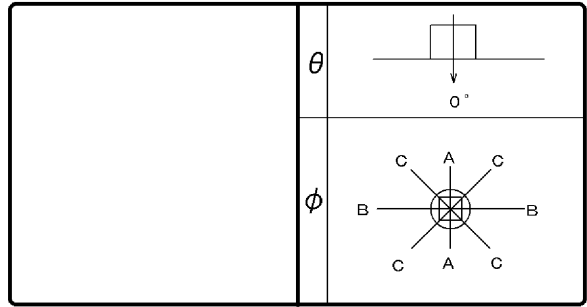

効 率	F	12%
	F	88%
	F	100%
	器具 光束	4300 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
θ	A-A	B-B	C-C
0°	280	280	280
10°	276	276	276
20°	263	263	263
30°	242	242	242
40°	214	213	213
50°	178	177	178
60°	136	136	137
70°	92	92	93
80°	50	50	50
90°	21	22	22
100°	16	16	16
110°	16	16	16
120°	18	18	18
130°	20	20	20
140°	21	21	21
150°	22	21	21
160°	22	22	22
170°	25	25	25
180°	26	26	26

反射率 (%)	天井						70						50						30		20		0			
	壁		70		50		30		70		50		30		50		30		30		10		0			
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室指数	固有照明率 (×0.01)																									
0.60	59	55	45	43	36	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25						
0.80	71	64	57	53	47	45	68	62	55	52	46	44	52	49	44	43	42	41	36	34						
1.00	78	70	64	59	54	52	75	68	62	58	53	51	58	55	50	49	48	47	42	39						
1.25	86	76	72	66	62	59	82	74	70	64	61	57	65	61	58	55	54	53	48	45						
1.50	91	80	78	71	68	64	86	77	75	69	66	62	70	65	63	60	59	57	52	49						
2.00	99	86	88	78	79	72	94	83	84	76	76	70	78	72	72	67	67	65	60	56						
2.50	104	89	94	83	85	77	99	87	90	81	83	75	83	77	77	72	72	69	64	61						
3.00	107	92	98	86	91	81	102	89	94	84	87	79	87	80	81	76	76	72	68	64						
4.00	112	95	105	91	98	86	106	93	100	88	94	84	92	84	87	81	81	77	73	69						
5.00	115	97	109	93	103	90	109	94	104	91	99	88	95	86	91	84	84	80	76	72						
10.00	121	101	117	99	114	97	115	99	112	97	109	95	102	92	100	90	91	86	83	79						

