


# 東芝照明器具配光データシート

名称	LEDシーリングライト
形名	LEDH84800-LC

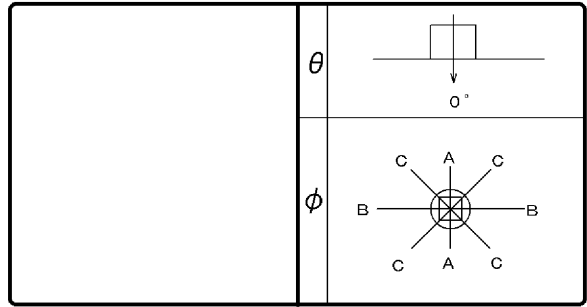

効 率	F	12 %
	F	88 %
	F	100 %
	器具 光束	4900 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.27 H
B-B	1.27 H

備考

光度 (cd/1000lm)			
$\theta$ \ $\phi$	A-A	B-B	C-C
0°	285	285	285
10°	280	280	280
20°	265	264	264
30°	242	241	241
40°	213	212	212
50°	177	176	177
60°	136	135	136
70°	92	91	92
80°	50	50	50
90°	22	22	22
100°	16	16	16
110°	17	17	17
120°	18	19	19
130°	20	20	20
140°	20	21	21
150°	21	22	22
160°	22	22	22
170°	25	25	25
180°	26	26	26

反射率 (%)	天井						70						50						30		20		0	
	壁		70		50		30		70		50		30		50		30		30		10		0	
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0	10	0
室指数	固有照明率 (×0.01)																							
0.60	59	55	45	43	37	35	57	53	44	42	36	35	41	40	34	33	33	32	28	25	33	32	28	25
0.80	71	65	57	53	47	45	68	62	55	52	46	45	52	49	44	43	42	41	36	34	42	41	36	34
1.00	78	70	64	59	54	52	75	68	62	58	53	51	58	55	50	49	48	47	42	39	48	47	42	39
1.25	86	76	72	66	63	59	82	74	70	64	61	57	65	61	58	55	54	53	48	45	54	53	48	45
1.50	91	80	78	71	69	64	86	77	75	69	66	62	70	65	63	60	59	57	52	49	59	57	52	49
2.00	99	86	88	78	79	72	94	83	84	76	76	70	78	72	72	67	67	65	60	56	67	65	60	56
2.50	104	89	94	83	85	77	99	87	90	81	82	75	83	76	77	72	72	69	64	61	72	69	64	61
3.00	107	92	98	86	91	81	102	89	94	84	87	79	87	80	81	76	76	72	68	64	76	72	68	64
4.00	112	95	105	90	98	86	106	92	100	88	94	84	92	84	87	81	81	77	73	69	81	77	73	69
5.00	115	97	109	93	103	90	109	94	104	91	99	88	95	86	91	84	84	80	76	72	84	80	76	72
10.00	121	101	117	99	114	97	115	99	112	97	109	95	102	92	99	90	91	86	83	79	91	86	83	79

