


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDH82773-LC

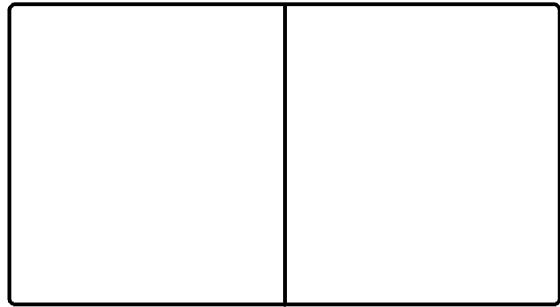

効 率	F	16%
	F	84%
	F	100%
	器具 光束	4700 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	カバー (乳白)
反射面	塗装 (白)

最大取付間隔	
A-A	1.3 H
B-B	1.3 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	223	223	223
10°	223	222	224
20°	217	215	219
30°	203	200	206
40°	183	178	184
50°	159	153	159
60°	135	129	130
70°	110	104	102
80°	81	75	73
90°	41	42	45
100°	38	33	39
110°	32	29	31
120°	26	23	29
130°	21	18	24
140°	16	14	18
150°	11	10	13
160°	7	6	8
170°	4	3	4
180°	1	1	1

反射率 (%)	天井	80			70			50			30		20	0						
	壁	70	50	30	70	50	30	50	30	30	30	10	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0				
室指数	固有照明率 (×0.01)																			
0.60	56	52	42	40	33	32	54	50	40	39	32	31	38	36	30	30	29	28	23	21
0.80	68	61	53	49	43	41	64	59	51	48	42	40	47	45	39	38	37	36	31	28
1.00	75	67	60	56	50	47	71	64	58	54	48	46	53	50	45	44	43	41	36	33
1.25	82	73	68	62	58	54	78	70	65	60	56	53	60	56	52	50	49	47	42	38
1.50	87	77	74	67	64	59	82	74	70	65	61	57	65	60	57	54	53	51	46	42
2.00	95	83	83	74	74	67	90	80	80	72	71	66	73	67	66	62	61	59	53	49
2.50	100	86	89	79	81	73	95	83	85	76	77	71	78	72	71	67	66	63	58	54
3.00	104	89	94	82	86	77	98	86	90	80	82	75	81	75	76	70	70	66	62	57
4.00	109	93	101	87	94	82	103	89	96	84	89	80	87	79	82	76	75	71	67	62
5.00	112	95	105	90	99	86	106	91	100	87	94	83	90	82	86	79	78	74	70	65
10.00	119	99	114	97	111	94	112	96	108	94	105	91	98	88	95	86	86	81	78	73

