


# 東芝照明器具配光データシート

名称	LEDダウンライト
形名	LEDD87000L (S) -LD

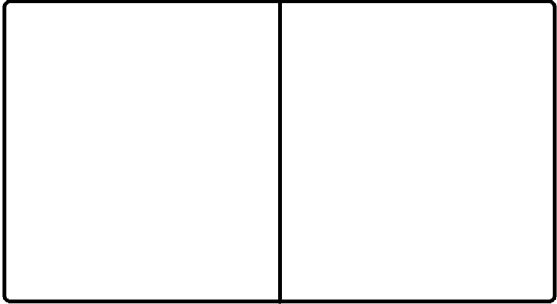

効 率	F	0 %
	F	100 %
	F	100 %
	器具光束	460 lm

保守率	良	0.67
	中	0.63
	否	0.56

前面	下面開放
反射面	塗装（銀色）

最大取付間隔	
A-A	1.2 H
B-B	1.2 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	426		
10°	417		
20°	391		
30°	347		
40°	284		
50°	210		
60°	138		
70°	58		
80°	8		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	67	61	53	51	45	44	65	60	53	50	45	43	51	49	44	43	43	38	37						
0.80	80	72	66	62	58	55	77	71	65	62	57	55	63	60	56	55	55	54	50	48					
1.00	87	78	74	69	65	62	84	76	73	68	64	61	70	66	63	61	62	60	56	54					
1.25	94	84	82	75	74	69	91	82	81	75	73	69	77	73	71	68	69	67	63	61					
1.50	99	87	88	80	80	74	96	86	86	79	78	73	82	77	76	72	74	71	68	66					
2.00	107	93	97	87	90	82	104	92	95	86	88	81	91	84	85	80	82	79	75	74					
2.50	111	96	103	91	96	87	108	95	100	90	94	86	95	88	90	84	87	83	80	78					
3.00	115	98	107	94	101	90	111	97	104	93	99	89	99	91	94	88	90	86	83	81					
4.00	119	101	113	98	107	94	115	100	109	96	105	94	103	94	99	92	95	90	88	86					
5.00	121	102	116	100	112	97	117	101	112	99	108	96	106	96	103	94	98	93	90	89					
10.00	126	106	123	104	121	103	122	104	119	103	117	102	112	101	101	100	103	98	96	94					

