


# 東芝照明器具配光データシート

名称	LED照明器具
形名	LEDD87952L (K) -LSX

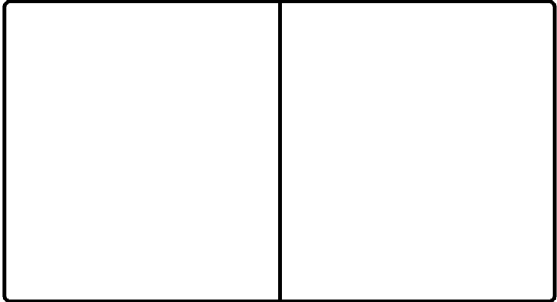

効 率	F	0 %
	F	100 %
	F	100 %
	器具 光束	240 lm

保守 率	良	0.63
	中	0.60
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	1.0 H
B-B	1.0 H

備考	
----	--

光度 (cd/1000lm)			
$\theta \setminus \phi$	A-A	B-B	C-C
0°	528		
10°	493		
20°	439		
30°	359		
40°	268		
50°	181		
60°	118		
70°	60		
80°	16		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井	80						70						50						30		20		0	
	壁	70	50	30	70	50	30	70	50	30	50	30	50	30	30	10	0								
床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0								
室指数	固有照明率 (×0.01)																								
0.60	69	64	56	53	48	47	67	63	55	53	48	47	54	52	47	46	47	46	42	40					
0.80	82	74	69	65	61	58	79	73	68	64	60	58	66	63	59	57	58	57	53	51					
1.00	88	79	76	70	67	64	86	78	74	70	67	64	72	68	65	63	64	62	58	56					
1.25	95	85	84	77	75	70	92	83	82	76	74	70	79	74	72	69	70	68	64	63					
1.50	100	88	89	81	81	75	97	87	87	80	80	75	83	78	77	73	75	73	69	67					
2.00	107	93	98	87	90	83	104	92	95	86	89	82	91	85	86	81	83	79	76	74					
2.50	111	96	103	91	96	87	108	95	100	90	94	86	95	88	90	85	87	83	80	78					
3.00	115	98	107	94	101	90	111	97	104	93	99	89	99	91	94	88	90	86	84	82					
4.00	119	101	113	97	107	94	114	99	109	96	105	94	103	94	99	92	95	90	88	86					
5.00	121	102	116	100	111	97	117	101	112	98	108	96	106	96	103	94	97	93	90	89					
10.00	126	105	123	104	121	103	121	104	119	103	117	101	111	101	101	100	103	98	96	94					

