


東芝照明器具配光データシート

名称	LED照明器具
形名	LEDD87953L (W) -LSX

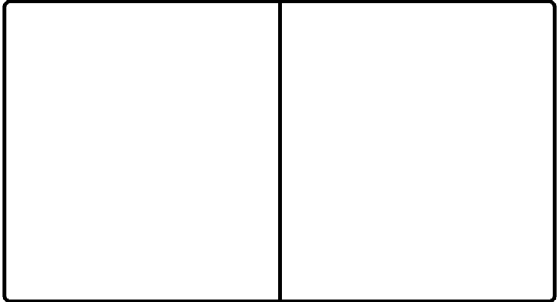

効 率	F	0 %
	F	101 %
	F	101 %
	器具 光束	555 lm

保守 率	良	0.67
	中	0.63
	否	0.56

前面	
反射面	

最大取付間隔	
A-A	0.4 H
B-B	0.4 H

備考	
----	--

θ	φ		
	A-A	B-B	C-C
0°	3968		
10°	2169		
20°	652		
30°	323		
40°	81		
50°	12		
60°	8		
70°	5		
80°	2		
90°	0		
100°	0		
110°	0		
120°	0		
130°	0		
140°	0		
150°	0		
160°	0		
170°	0		
180°	0		

反射率 (%)	天井		80						70						50						30		20		0	
	壁	床	70		50		30		70		50		30		50		30		30		10		0			
			30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	0		
室指数	固有照明率 (×0.01)																									
0.60	103	94	96	91	91	88	101	94	95	91	91	88	94	90	90	88	89	88	86	86						
0.80	112	101	105	99	101	97	110	101	104	98	100	97	102	98	99	96	98	96	95	94						
1.00	113	101	106	98	102	96	111	101	105	98	101	96	103	97	99	96	98	95	94	93						
1.25	114	102	108	99	103	96	112	101	106	98	102	96	103	97	100	95	98	95	93	92						
1.50	116	102	110	100	105	98	114	102	108	99	104	97	105	98	101	96	99	95	94	93						
2.00	119	104	113	101	108	99	116	103	111	100	107	98	107	99	103	97	100	96	95	94						
2.50	121	105	116	102	111	100	118	104	113	102	109	100	108	100	105	99	102	97	96	95						
3.00	123	105	118	103	114	102	119	104	115	103	112	101	110	101	107	100	103	98	97	95						
4.00	126	107	122	105	118	104	122	106	118	104	116	103	112	103	110	102	105	100	99	97						
5.00	127	108	124	107	122	106	123	107	121	106	118	105	114	104	112	103	107	102	100	99						
10.00	131	110	130	110	129	110	127	109	126	109	125	109	118	107	117	107	111	105	104	102						

